


CMIBPF-335
Band Pass Filter

Center Frequency	335 MHz
Pass Band Frequency	320 – 350 MHz
Pass Band Insertion Loss	0.5 dB Max
Ripple	0.7 dB Max
Rejection - 300MHz	40 dB min
Rejection - 380MHz	40 dB min
Input / Output Impedance	50Ω
Input / Output Connector	SMA F → SMA M
Continuous RF Power	2W

All Dimensions in inches

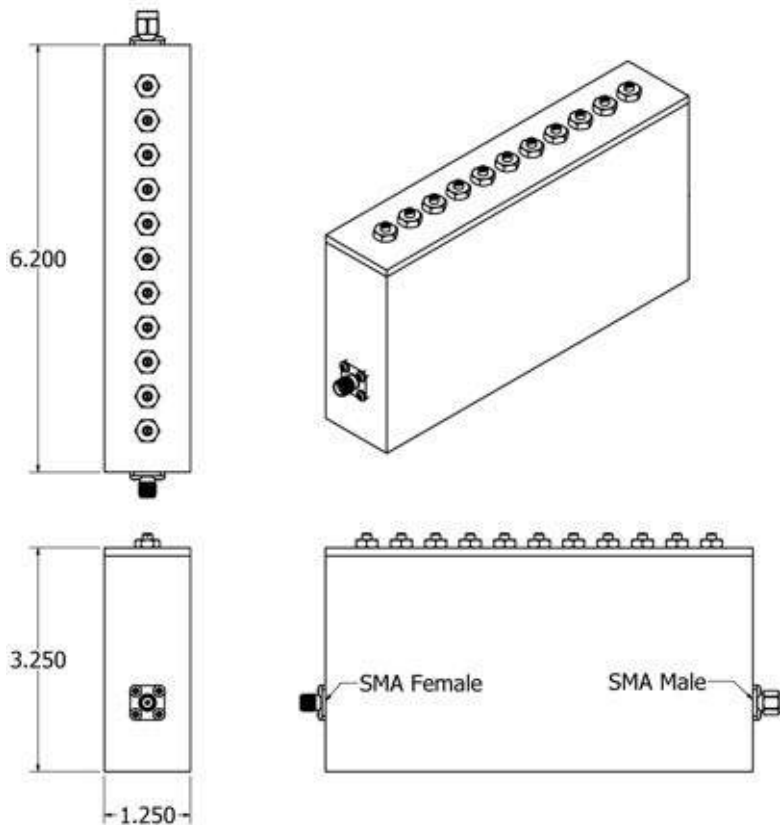

CALL OUR SALES DEPARTMENT FOR MORE INFORMATION OR VARIATIONS OF THIS PRODUCT.

Corry Micronics, Inc. One Plastics Rd. - Corry, PA 16407
(724) 940-7556 ext. 138 Fax (724) 940-7707 www.cormic.com

Corry Micronics Inc. herein referred to CMI, believes this information to be accurate, but makes no warranties, expressed or implied as to the accuracy of this document. CMI assumes no liability for any injury, loss, damage, direct or consequential arising from the use of our products. User assumes all risk whatsoever in connection with it's intended use. CMI also reserves the right to change this document without notice. 4/17/15