



CORRY MICRONICS, INC PRODUCT SPECIFICATION

RFMS-2X8X8-SS 8 Channel Matrix with Probe Port

The Matrix consists of 8 through channels with the ability to divert any one channel through an ancillary port. The Matrix features solid state transistor switching, 1 Watt RF power capability per port and operates from VHF through 6 GHz.

Electrical Specifications

Frequency Range	30 MHz to 6 GHz
Insertion Loss ports 1 to 8, no probe	3.7 dB max (3GHz) 6.0 dB max (6GHz)
Insertion Loss ports 1 to 8, thru probe ports	7.2 dB max (3GHz) 11.2 dB max (6GHz)
Isolation between ports	30dB min
VSWR	2:1 max
RF Power per channel	1 W max
Switching Speed	2 usec max
Return Loss	10 dB min
Impedance	50 Ω
RF Input / Output Connectors	N-Female
Power Input	115/230 VAC 50/60Hz
Control	TTL over 15 pin female D-SUB connector
Operating Temperature	0° C to +50° C
Size	2U, 19" rack mount enclosure

CALL OUR SALES DEPARTMENT FOR MORE INFORMATION OR VARIATIONS OF THIS PRODUCT.


Corry Micronics, Inc. One Plastics Rd. - Corry, PA 16407
(724) 940-7556 ext. 138 Fax (724) 940-7707 www.cormic.com

Corry Micronics Inc. herein referred to CMI, believes this information to be accurate, but makes no warranties, expressed or implied as to the accuracy of this document. CMI assumes no liability for any injury, loss, damage, direct or consequential arising from the use of our products. User assumes all risk whatsoever in connection with it's intended use. CMI also reserves the right to change this document without notice. 5/17/17



CORRY MICRONICS, INC **PRODUCT SPECIFICATION**

Block Diagram

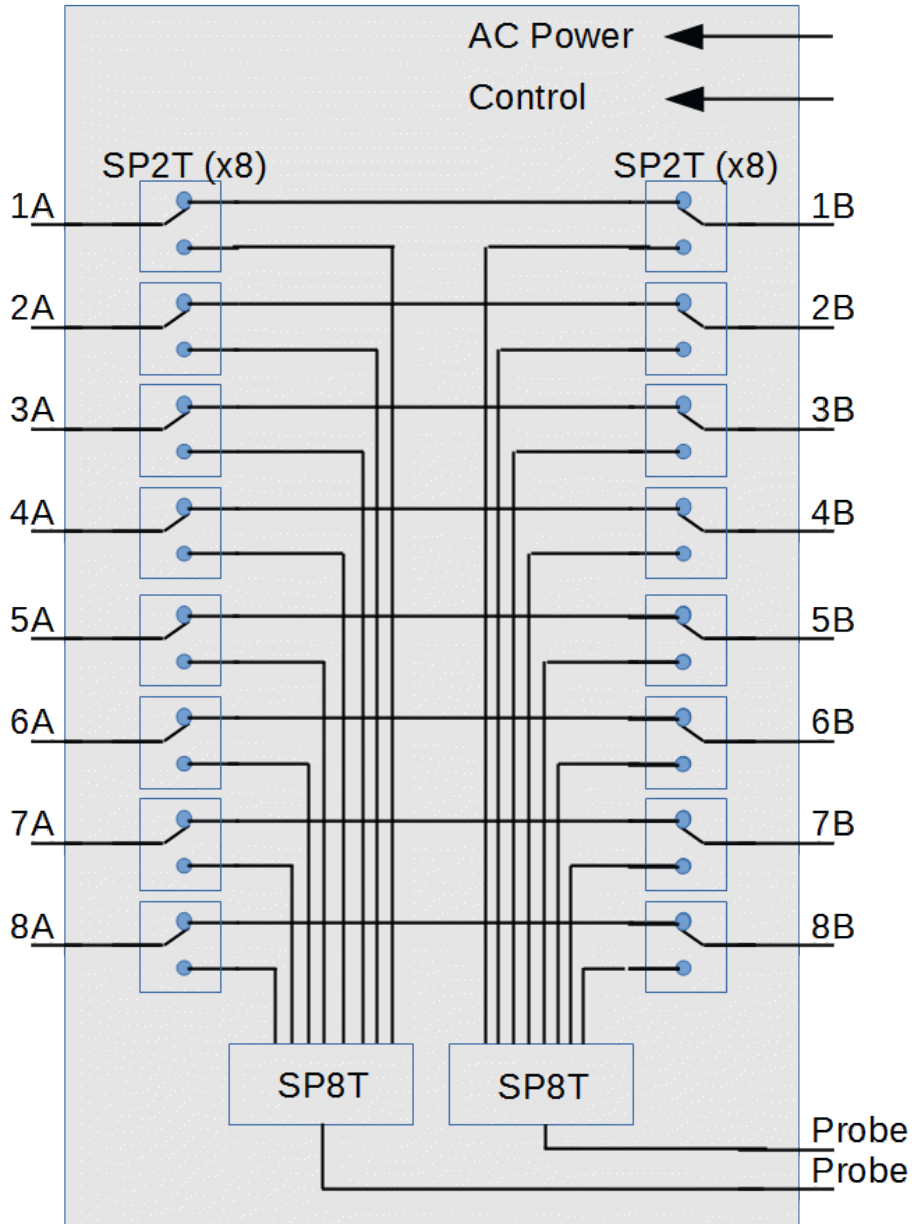

CALL OUR SALES DEPARTMENT FOR MORE INFORMATION OR VARIATIONS OF THIS PRODUCT.

Corry Micronics, Inc. One Plastics Rd. - Corry, PA 16407

(724) 940-7556 ext. 138 Fax (724) 940-7707 www.cormic.com

Corry Micronics Inc. herein referred to CMI, believes this information to be accurate, but makes no warranties, expressed or implied as to the accuracy of this document. CMI assumes no liability for any injury, loss, damage, direct or consequential arising from the use of our products. User assumes all risk whatsoever in connection with its intended use. CMI also reserves the right to change this document without notice. 5/17/17