

CDMA&GSM-05

Features:

Specially Designed for CDMA/GSM
Repeater, Base Station and Indoor
Systems
Confirms to ITU Technical Standards

Applications:

CDMA/GSM Repeater, Base Station
CDMA/GSM Indoor Systems

**Technical Specifications:**

Frequency Range: 825 to 835MHz
870 to 880MHz
909 to 915MHz
954 to 960MHz
Insertion Loss: 1.8dB maximum
1.6dB typical
Passband ripple: ± 0.5 dB p-p maximum
Return Loss: 18 maximum
Outband Rejection:
 ≥ 80 dB @ CDMA up to down isolation
 ≥ 90 dB @ GSM up to down isolation

Operating Temperature: -30 to +55 °C

Storage Temperature: -40 to +85 °C

Operating Humidity: 0 to 90%, relative



Connector: N-F or SMA-F

CALL OUR SALES DEPARTMENT FOR MORE INFORMATION OR VARIATIONS OF THIS PRODUCT.

Corry Micronics, Inc. One Plastics Rd. - Corry, PA 16407
(814) 664-7728 Fax (814) 664-4582 www.cormic.com

Corry Micronics Inc. herein referred to CMI, believes this information to be accurate, but makes no warranties, expressed or implied as to the accuracy of this document. CMI assumes no liability for any injury, loss, damage, direct or consequential arising from the use of our products. User assumes all risk whatsoever in connection with it's intended use. CMI also reserves the right to change this document without notice.

Outline Drawing:

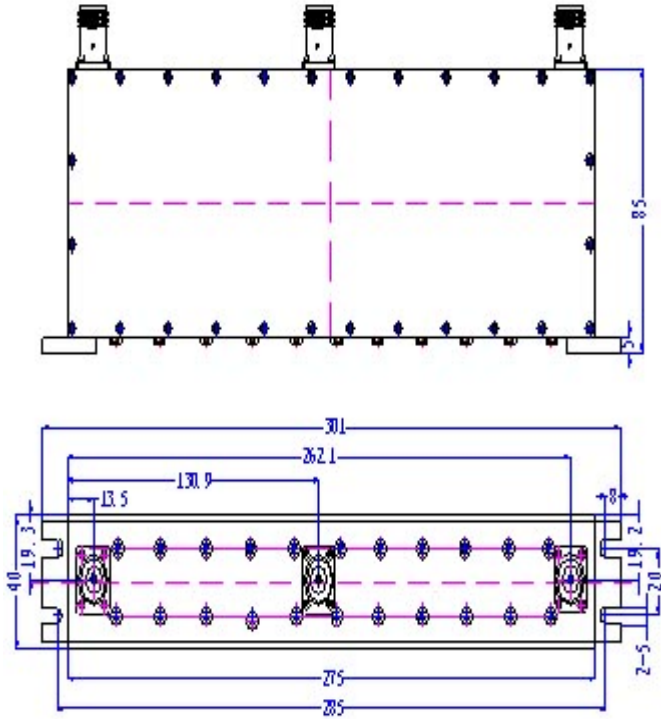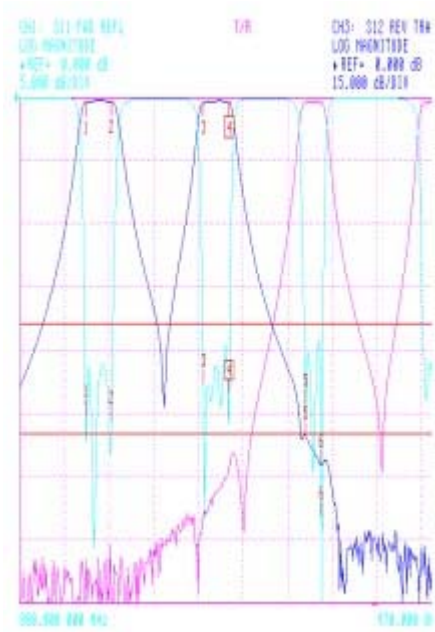

Note:

If no special requirement is mentioned on order, default finish is painted in deep gray. Options include completely or partially painted or unpainted.

CALL OUR SALES DEPARTMENT FOR MORE INFORMATION OR VARIATIONS OF THIS PRODUCT.

Corry Micronics, Inc. One Plastics Rd. - Corry, PA 16407
(814) 664-7728 Fax (814) 664-4582 www.cormic.com

Corry Micronics Inc. herein referred to CMI, believes this information to be accurate, but makes no warranties, expressed or implied as to the accuracy of this document. CMI assumes no liability for any injury, loss, damage, direct or consequential arising from the use of our products. User assumes all risk whatsoever in connection with it's intended use. CMI also reserves the right to change this document without notice.