


RF FILTER SPECIFICATION

Part No. BP33R1880S175DP

Electrical Specifications				
Item	Parameter		CMI Specification	Unit
1	Center Frequency (fo)		1880	MHz
2	Bandwidth (BW)		175	MHz
3	Insertion loss	1795 - 1970 MHz	3.0 max.	dB
		1850 ~ 1910 MHz	0.8 max.	dB
4	Ripple in 1850 ~ 1910 MHz		0.3 max.	dB
5	VSWR in 1850 ~ 1910 MHz		1.5 max.	-
6	Input power		1 max.	watt
7	Attenuation [Absolute Value]		30 min. at 1350 MHz	dB
			30 min. at 1665 MHz	
			5 min. at 2050 MHz	
			40 min. at 3000 MHz	
			40 min. at 3800 MHz	

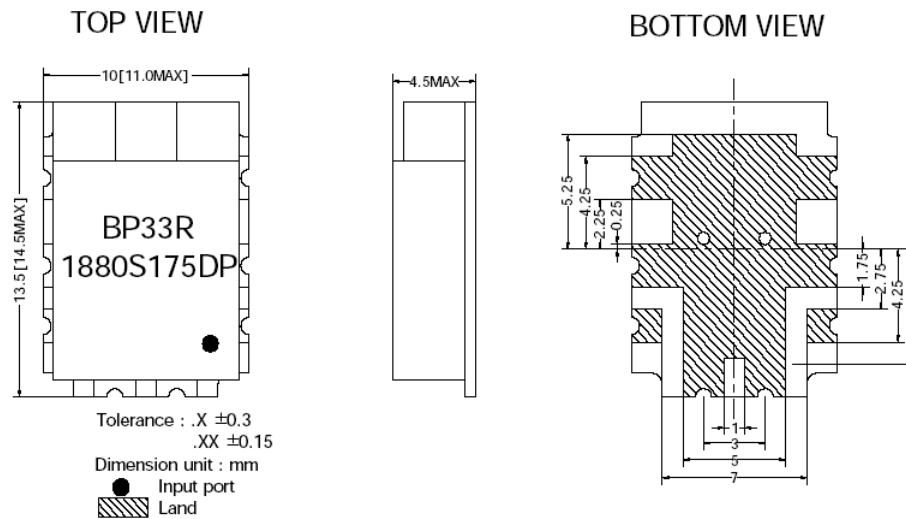

CALL OUR SALES DEPARTMENT FOR MORE INFORMATION OR VARIATIONS OF THIS PRODUCT.

Corry Micronics, Inc. One Plastics Rd. - Corry, PA 16407
(814) 664-7728 Fax (814) 664-4582 www.cormic.com

Corry Micronics Inc. herein referred to CMI, believes this information to be accurate, but makes no warranties, expressed or implied as to the accuracy of this document. CMI assumes no liability for any injury, loss, damage, direct or consequential arising from the use of our products. User assumes all risk whatsoever in connection with it's intended use. CMI also reserves the right to change this document without notice.