

WCDMA-01

Features:

Specially Designed for WCDMA Repeater
Confirm to ITU Technical Standards
High Rejection
Compact Size

Applications:

WCDMA 3G Communication Equipment

**Technical Specifications:**

Frequency Range: 1920 to 1980MHz
2110 to 2170MHz
Insertion Loss: 1dB maximum
0.8dB typical
Passband Ripple: 0.5dB p-p maximum
Return Loss: 18dB minimum
Outband Rejection:
≥45dB @ 1900MHz~2000 MHz
≥45dB @ 2190MHz~2090 MHz
≥90dB @ Channel Isolation

Power:100 watts

Operating Temperature: -30 to +75 °C

Storage Temperature: -40 to +85 °C

Operating Humidity: 0 to 90%, relative

Dimension: 140×136×27mm


Connectors: SMA/N

CALL OUR SALES DEPARTMENT FOR MORE INFORMATION OR VARIATIONS OF THIS PRODUCT.


Corry Micronics, Inc. One Plastics Rd. - Corry, PA 16407
(814) 664-7728 Fax (814) 664-4582 www.cormic.com

Corry Micronics Inc. herein referred to CMI, believes this information to be accurate, but makes no warranties, expressed or implied as to the accuracy of this document. CMI assumes no liability for any injury, loss, damage, direct or consequential arising from the use of our products. User assumes all risk whatsoever in connection with it's intended use. CMI also reserves the right to change this document without notice.

Outline Drawing:

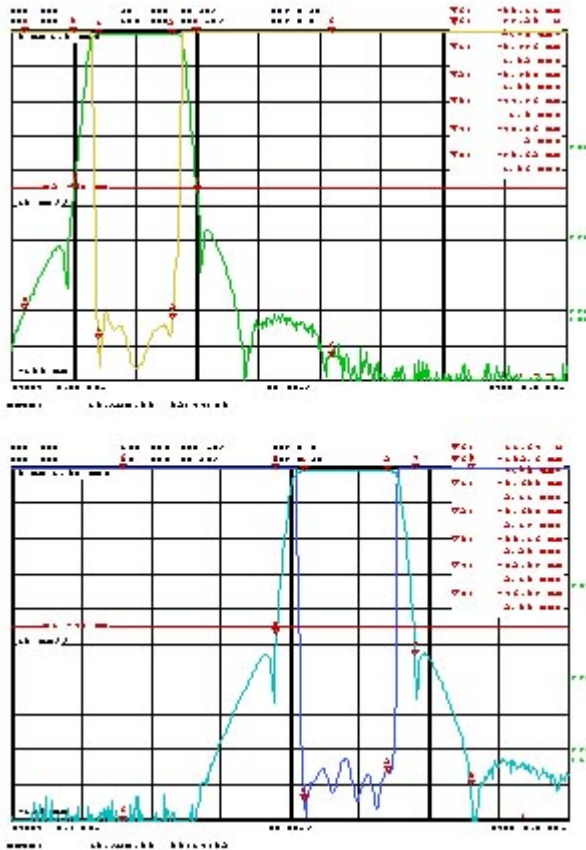

Outline Drawing:

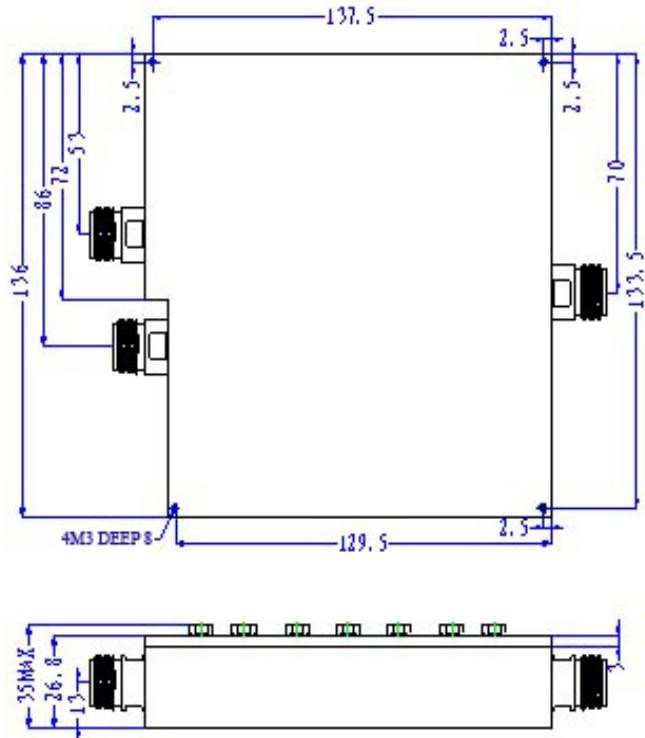

Notes:

Connector type is optional of N-type or SMA, according to requirement.

CALL OUR SALES DEPARTMENT FOR MORE INFORMATION OR VARIATIONS OF THIS PRODUCT.

**Corry Micronics, Inc. One Plastics Rd. - Corry, PA 16407
(814) 664-7728 Fax (814) 664-4582 www.cormic.com**

Corry Micronics Inc. herein referred to CMI, believes this information to be accurate, but makes no warranties, expressed or implied as to the accuracy of this document. CMI assumes no liability for any injury, loss, damage, direct or consequential arising from the use of our products. User assumes all risk whatsoever in connection with it's intended use. CMI also reserves the right to change this document without notice.