


RF FILTER SPECIFICATIONS


Part No. BP34R1960S60M

Electrical Specifications			
Item	Parameter	General Specification	
1	Center Frequency	1960 MHz	
2	Poles	4	
3	Bandwidth (BW)	$F_0 \pm 30$ MHz	
4	Insertion loss in BW	4.5 dB max.	
5	Ripple in BW	1.6 dB max.	
6	VSWR	2.0 max.	
7	Input power	1 watt max.	
8	Attenuation (Absolute Value)	Frequency	Specification
		$F_0 \pm 50$ MHz	12 dB min.
		$F_0 \pm 100$ MHz	30 dB min.
		$F_0 \pm 200$ MHz	50 dB min.

TOP VIEW

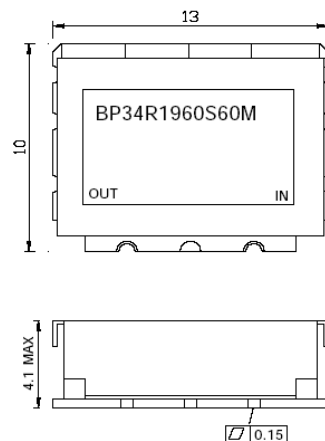

BOTTOM VIEW

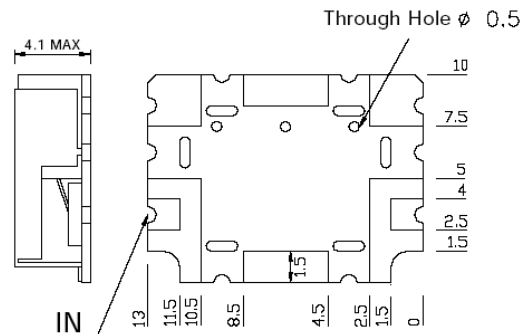

Tolerances unless
otherwise specified : ± 0.3
Dimension : mm

CALL OUR SALES DEPARTMENT FOR MORE INFORMATION OR VARIATIONS OF THIS PRODUCT.

Corry Micronics, Inc. One Plastics Rd. - Corry, PA 16407
(814) 664-7728 Fax (814) 664-4582 www.cormic.com

Corry Micronics Inc. herein referred to CMI, believes this information to be accurate, but makes no warranties, expressed or implied as to the accuracy of this document. CMI assumes no liability for any injury, loss, damage, direct or consequential arising from the use of our products. User assumes all risk whatsoever in connection with it's intended use. CMI also reserves the right to change this document without notice.