


CORRY Micronics

Pi Attenuation Characteristics

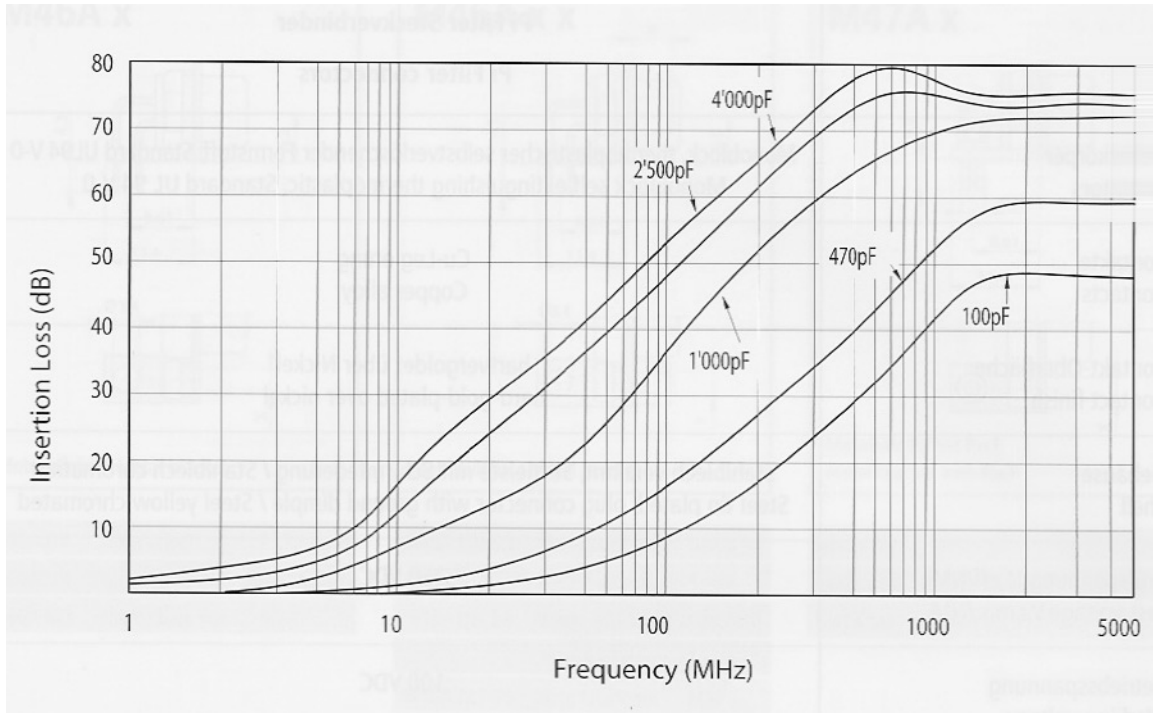

Minimum Insertion Loss (dB)

Filter Capacitance (pF)	470 +80%	820 +80%	1000 +80%	1700 +100%	2500 +100%	5000 +100%
(@ 25°C, 1 kHz, 1.0 VRMS)	-20%	-20%	-20%	0	0	0
Dielectric Material	X7R	X7R	X7S	X7T	X7W	X5W
Insertion Loss (dB minimum)						
5 MHz	-	-	-	1	3	7
10 MHz	-	-	2	6	9	14
20 MHz	-	3	7	14	16	27
50 MHz	9	13	16	28	28	41
100 MHz	18	22	24	35	41	53
200 MHz	22	30	36	48	52	66
500 MHz	36	42	48	60	62	70
1 GHz	43	50	55	70	70	70
Working Voltage (VDC)	100	100	100	100	100	100
DWV (VDC)*	250	250	250	250	250	250