
SIZE	FILTER	CAPACITANCE		VOLTAGE		CURRENT	CONTACT	MIN	MINIMUM ATTENUATION (dB)			3)			
	TYPE	MIN	MAX	WVDC	DWV	RATING	RESISTANCE	5 MHz	10 MHz	20 MHz	50 MHz	100 MHz	200 MHz	500 MHz	1 GHz
15	С	400	600	100	250	5A	.010 Ohms			3	10	15	22	31	37

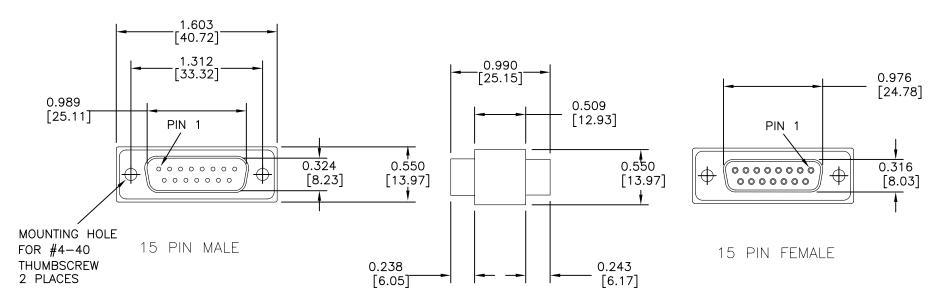

NOTES

- 1) SHELLS: STEEL, TIN PLATED.
- 2) CONTACTS: COPPER ALLOY, GOLD PLATED, .000010" TYP.
- 3) INSULATORS AND BACK COVER: PLASTIC, UL94-VO.
- 4) MATING SHELL (MALE SIDE) HAS GROUNDING DIMPLES.
- 5) OPERATING TEMPERATURE: -55°C TO +125°C.
- 6) MARKING: PART NUMBER IS INK STAMPED ON REAR COVER.
- 7) EACH UNIT INCLUDES TWO #4-40 THUMBSCREWS (NOT SHOWN). EACH THUMBSCREW IS CAPTIVE WITHIN THE MOUNTING HOLES.

<u> </u>	ALL DIMENSIONS ARE IN INCHES (mm)	Micronics		Corry, PA 16407			
C.O. 2710	GENERAL TOLERANCES UNLESS OTHERWISE SPECIFIED	[IVIICTOTICS] (814) 664-7728 FAX (814) 664-458 www.cormic.com					
	DECIMAL: ± .025 [.64]	Dwg By: RPM Date:	08/12/05 Chk'd E	By: RPM			
2/05 2/05	ANGLES: ± 1°	Scale: 1X File:		Sheet:			
12/2/	CAGE CODE	15 PIN, ADAPTER, 500 PF "C"					
780	15717	DSC15-300-L00					