


CMIBPF-590-18S
Band Pass Filter

Center Frequency	590 MHz
3.0 dB Bandwidth	75 MHz
Pass Band	520 – 620 MHz
Pass Band Insertion Loss	1.0 dB MAX
Pass Band Return Loss	-18 dB
Rejection	70 dBc Min @ DC – 470 MHz
Power Handling	50 W
Operating Temperature	-40°C to +85°C

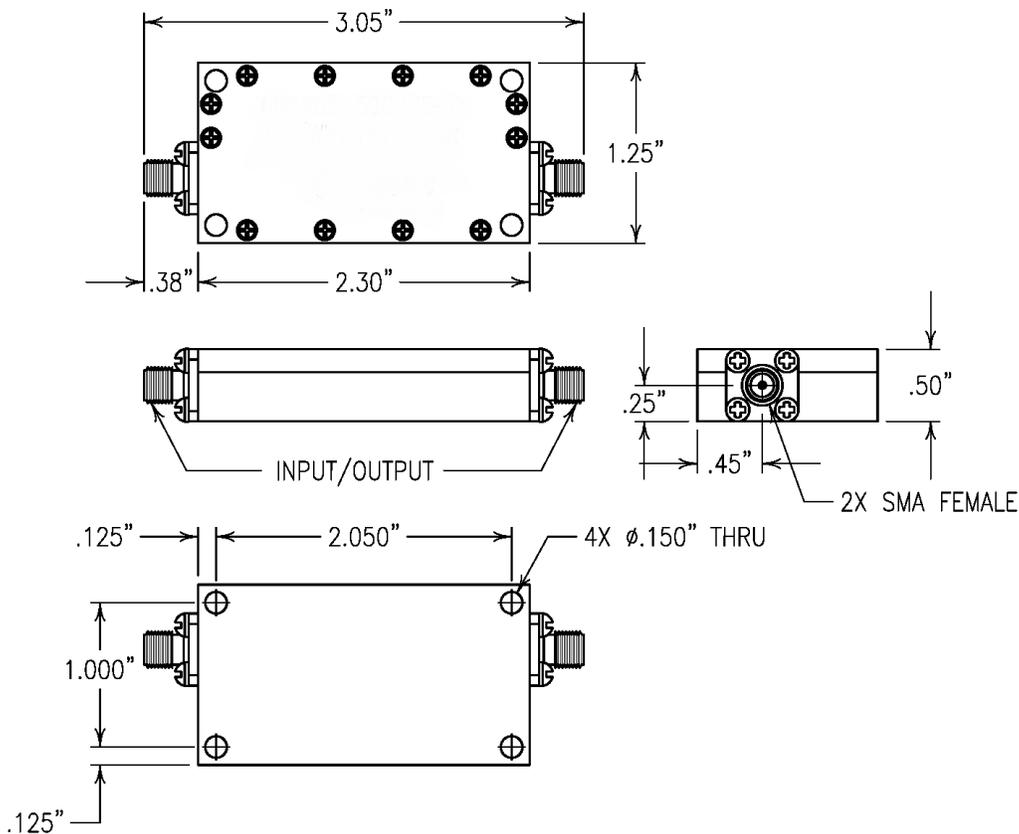

CALL OUR SALES DEPARTMENT FOR MORE INFORMATION OR VARIATIONS OF THIS PRODUCT.

Corry Micronics, Inc. One Plastics Rd. - Corry, PA 16407

(724) 940-7556 ext. 138 Fax (724) 940-7707 www.cormic.com

Corry Micronics Inc. herein referred to CMI, believes this information to be accurate, but makes no warranties, expressed or implied as to the accuracy of this document. CMI assumes no liability for any injury, loss, damage, direct or consequential arising from the use of our products. User assumes all risk whatsoever in connection with it's intended use. CMI also reserves the right to change this document without notice. 4/1/14