




CMIBF-13000X6000
Inter Digital Filter

Parameters	Specifications
Center Frequency(F0)	13GHz
Pass Band Frequency	10~16GHz
Bandwidth@3dB	≥6.0GHz
Insertion Loss	≤1.0dB
VSWR	≤1.5:1
Attenuation	≥30dB @ DC~8.5GHz ≥30dB @ 17.5~20GHz
Connectors	SMA-Female
Power	1W
Impedance	50 ohms
Operating Temperature	-40°C~+70°C
Surface Finish	Natural Conductive Oxidation
Dimensions	See Attached Drawing (Dimensions are in inches [mm])

Outline Drawing

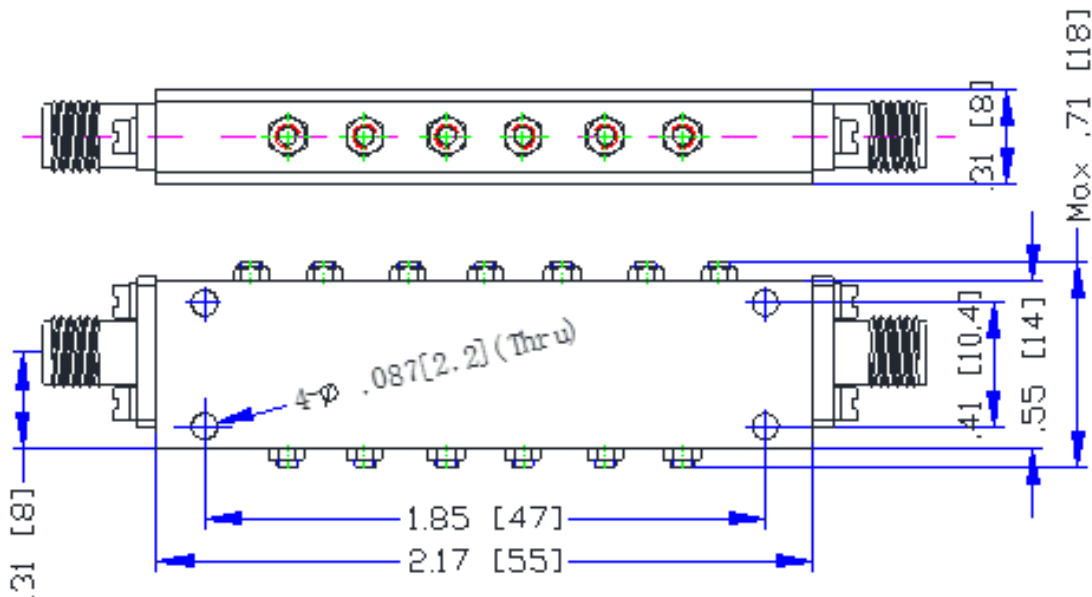

CALL OUR SALES DEPARTMENT FOR MORE INFORMATION OR VARIATIONS OF THIS PRODUCT.

Corry Micronics, Inc. One Plastics Rd. - Corry, PA 16407
(724) 940-7556 ext. 138 Fax (724) 940-7707 www.cormic.com

Corry Micronics Inc. herein referred to CMI, believes this information to be accurate, but makes no warranties, expressed or implied as to the accuracy of this document. CMI assumes no liability for any injury, loss, damage, direct or consequential arising from the use of our products. User assumes all risk whatsoever in connection with its intended use. CMI also reserves the right to change this document without notice. 05/29/2018