THIS IS A CAD DRAWING – DO NOT MAKE MANUAL CHANGES TO IT.
PROPERTY OF CMI – DO NOT COPY OR DISTRIBUTE WITHOUT PERMISSION.

DSC25–300–K00

| SIZE | FILTER TYPE | CAPACITANCE (pF) | | VOLTAGE | | CURRENT RATING | CONTACT RESISTANCE | MINIMUM ATTENUATION (dB) | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | | MIN | MAX | WVDC | DWV | | | 5 MHz | 10 MHz | 20 MHz | 50 MHz | 100 MHz | 200 MHz | 500 MHz | 1 GHz |
| 25 | C | 5000 | 10000 | 100 | 250 | 5A | .010 Ohms | 10 | 16 | 22 | 30 | 35 | 41 | 50 | 52 |

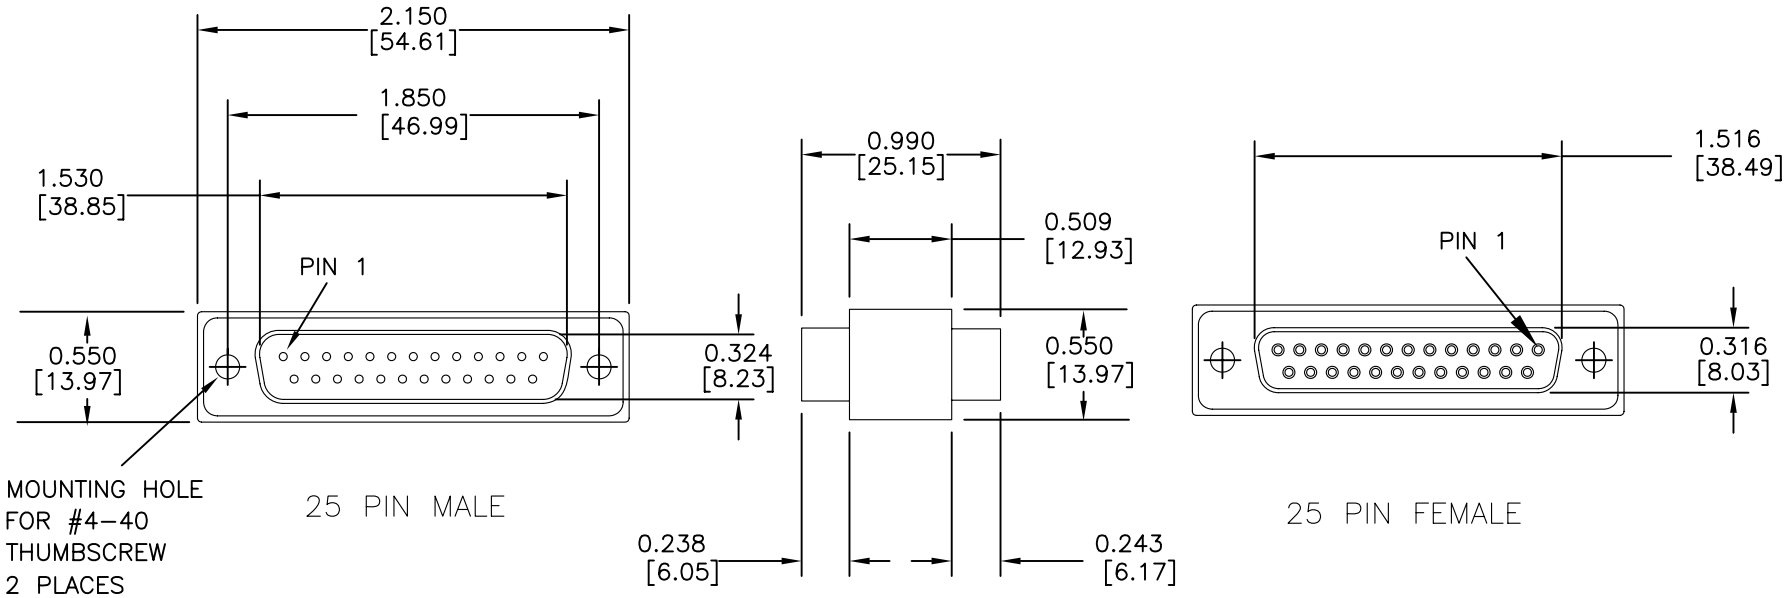


NOTES
1) SHELLS: STEEL, TIN PLATED.
2) CONTACTS: COPPER ALLOY, GOLD PLATED, .000010" TYP.
3) INSULATORS AND BACK COVER: PLASTIC, UL94–V0.
4) MATING SHELL (MALE SIDE) HAS GROUNDING DIMPLES.
5) OPERATING TEMPERATURE: –55°C TO +125°C.
6) MARKING: PART NUMBER IS INK STAMPED ON REAR COVER.
7) EACH UNIT INCLUDES TWO #4–40 THUMBSCREWS (NOT SHOWN). EACH THUMBSCREW IS CAPTIVE WITHIN THE MOUNTING HOLES.

| REV | C.O. | DATE |
|---|---|---|
| 0 | 2710 | 08/12/05 |

ALL DIMENSIONS ARE IN INCHES (mm)
GENERAL TOLERANCES UNLESS OTHERWISE SPECIFIED
DECIMAL: ± .025 [.64]
ANGLES: ± 1°
CAGE CODE 15717

CORRY Micronics
One Plastics Rd. – Corry, PA 16407
(814) 664–7728 FAX (814) 664–4582
www.cormic.com

Dwg By: RPM | Date: 08/12/05 | Chk'd By: RPM
Scale: 1X | File: | Sheet:

25 PIN, ADAPTER, 5000 PF "C"

DSC25–300–K00