


SIZE	FILTER TYPE	CAPACITANCE (pF)		VOLTAGE		CURRENT RATING	CONTACT RESISTANCE	MINIMUM ATTENUATION (dB)							
		MIN	MAX	WVDC	DWV			5 MHz	10 MHz	20 MHz	50 MHz	100 MHz	200 MHz	500 MHz	1 GHz
15	Pi	100	200	100	250	5A	.010 Ohms				2	6	11	27	40

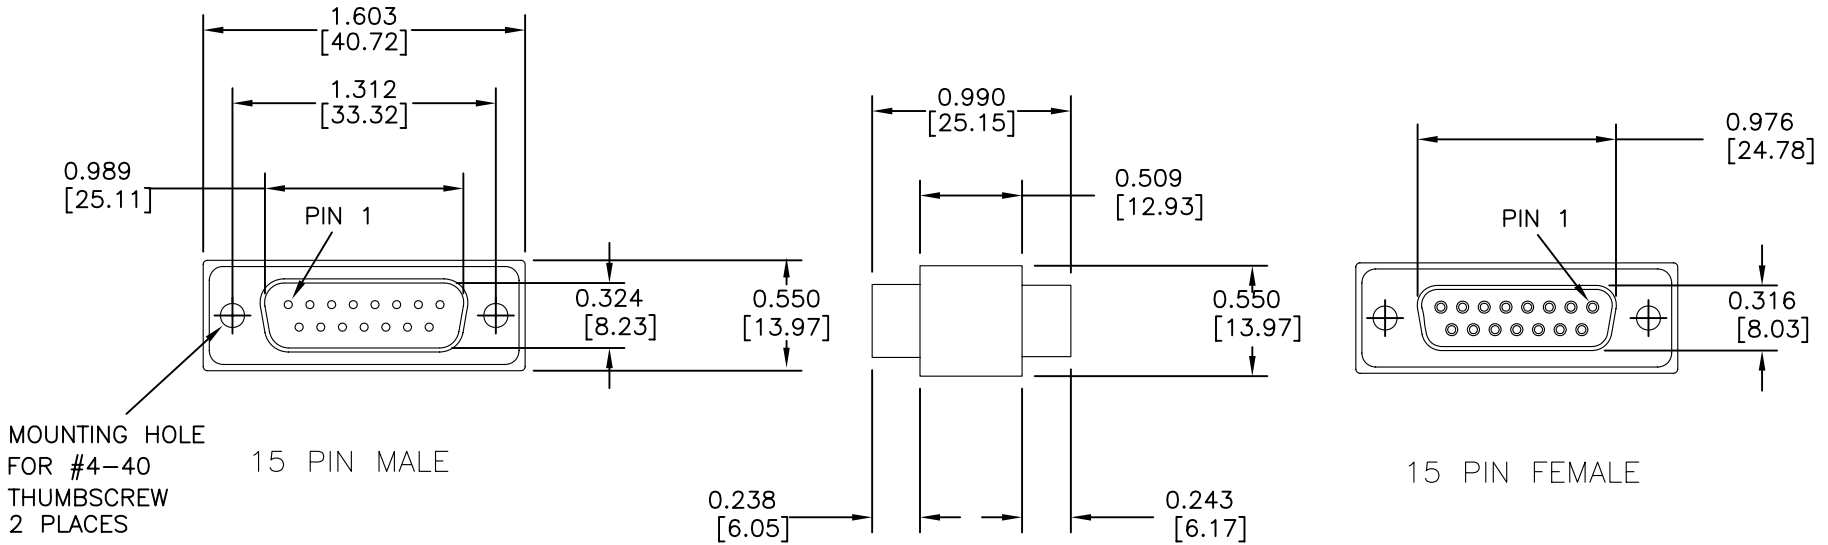

MOUNTING HOLE FOR #4-40 THUMBSCREW 2 PLACES

15 PIN MALE

15 PIN FEMALE

NOTES

- 1) SHELLS: STEEL, TIN PLATED.
- 2) CONTACTS: COPPER ALLOY, GOLD PLATED, .000010" TYP.
- 3) INSULATORS AND BACK COVER: PLASTIC, UL94-V0.
- 4) MATING SHELL (MALE SIDE) HAS GROUNDING DIMPLES.
- 5) OPERATING TEMPERATURE: -55°C TO +125°C.
- 6) MARKING: PART NUMBER IS INK STAMPED ON REAR COVER.
- 7) EACH UNIT INCLUDES TWO #4-40 THUMBSCREWS (NOT SHOWN). EACH THUMBSCREW IS CAPTIVE WITHIN THE MOUNTING HOLES.

DATE	08/12/05																				
C.O. REV	2710	0																			

ALL DIMENSIONS ARE IN INCHES (mm)  
 GENERAL TOLERANCES UNLESS OTHERWISE SPECIFIED  
 DECIMAL: ± .025 [.64]  
 ANGLES: ± 1°  
 CAGE CODE 15717

<b>Micronics</b>		One Plastics Rd. - Corry, PA 16407 (814) 664-7728 FAX (814) 664-4582 www.cormic.com	
Dwg By: RPM	Date: 08/12/05	Chk'd By: RPM	
Scale: 1X	File:	Sheet:	
15 PIN, ADAPTER, 100 PF "Pi"			
DSP15-300-A00			