


SIZE	FILTER TYPE	CAPACITANCE (pF)		VOLTAGE		CURRENT RATING	CONTACT RESISTANCE	MINIMUM ATTENUATION (dB)							
		MIN	MAX	WVDC	DWV			5 MHz	10 MHz	20 MHz	50 MHz	100 MHz	200 MHz	500 MHz	1 GHz
25	Pi	470	940	100	250	5A	.010 Ohms			5	9	18	22	36	43

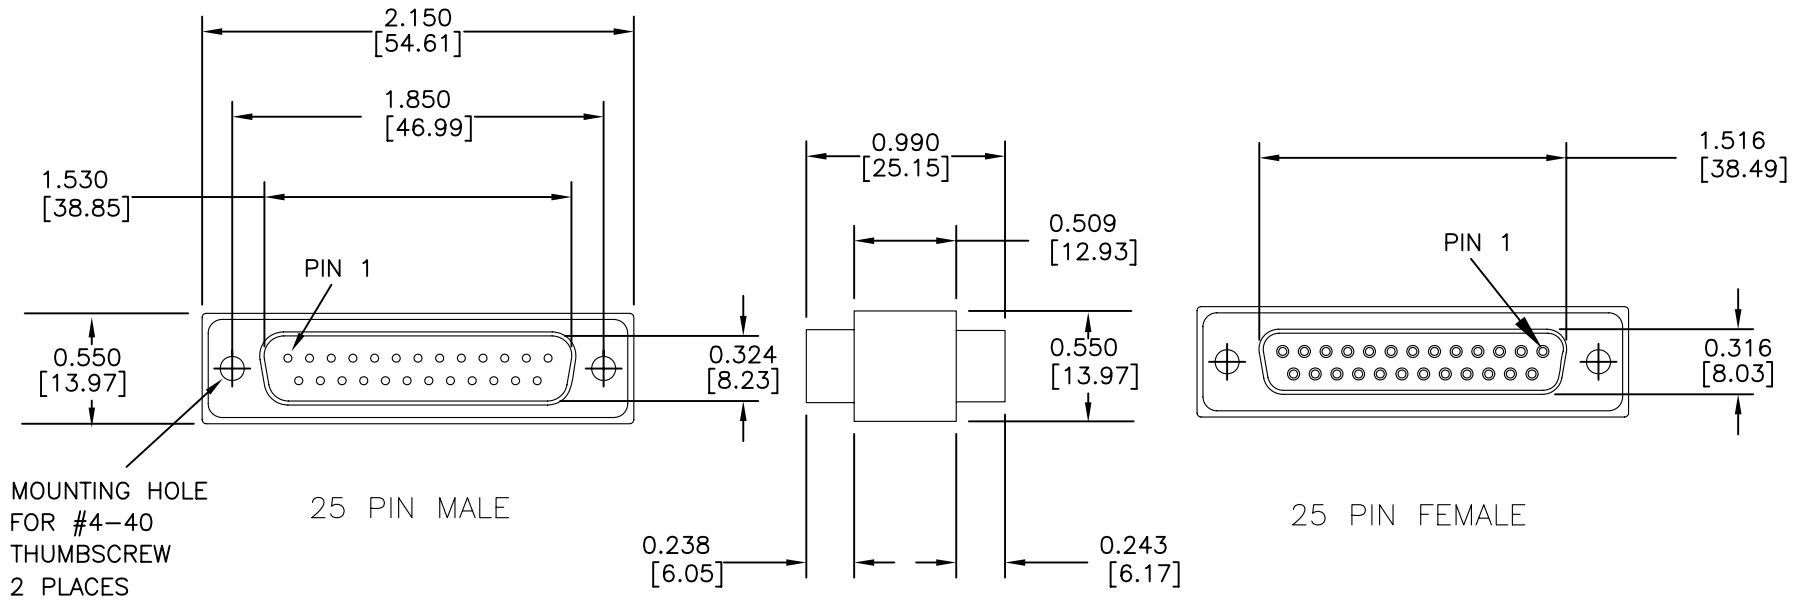

MOUNTING HOLE
FOR #4-40
THUMBSCREW
2 PLACES

25 PIN MALE

25 PIN FEMALE

NOTES

- 1) SHELLS: STEEL, TIN PLATED.
- 2) CONTACTS: COPPER ALLOY, GOLD PLATED, .000010" TYP.
- 3) INSULATORS AND BACK COVER: PLASTIC, UL94-V0.
- 4) MATING SHELL (MALE SIDE) HAS GROUNDING DIMPLES.
- 5) OPERATING TEMPERATURE: -55°C TO +125°C.
- 6) MARKING: PART NUMBER IS INK STAMPED ON REAR COVER.
- 7) EACH UNIT INCLUDES TWO #4-40 THUMBSCREWS (NOT SHOWN). EACH THUMBSCREW IS CAPTIVE WITHIN THE MOUNTING HOLES.

DATE	C.O. REV	0															
08/12/05	2710																

ALL DIMENSIONS ARE IN INCHES (mm)
GENERAL TOLERANCES UNLESS OTHERWISE SPECIFIED
DECIMAL: ± .025 [.64]
ANGLES: ± 1°
CAGE CODE 15717

Micronics	One Plastics Rd. - Corry, PA 16407		
	(814) 664-7728	FAX (814) 664-4582	
	www.cormic.com		
Dwg By: RPM	Date: 08/12/05	Chk'd By: RPM	
Scale: 1X	File:	Sheet:	
25 PIN, ADAPTER, 470 PF "Pi"			
DSP25-300-C00			