



FTF20-08 RFI FILTER

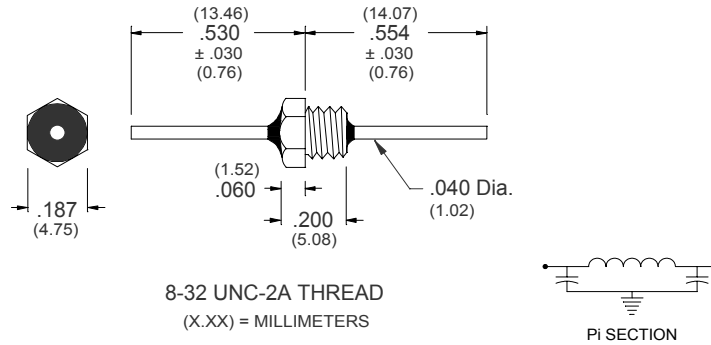

Capacitance: 1000 pF Min.
 Dissipation Factor: 5% Max.
 Working Volts DC: 100*
 Dielectric Withstanding Voltage: 250 VDC, 2 Seconds
 Insulation Resistance @ 25°C: 10 GΩ Min.
 Max. Current: 10 Amps DC
 DC Resistance: .01Ω Max.
 Operating Temperature: -55 °C - +85 °C
 Recommend Mounting Torque: 3-5 Inch/Lbs.
 Insertion Loss:

10 MHz	5 dB
100 MHz	42 dB
1Ghz	65 dB

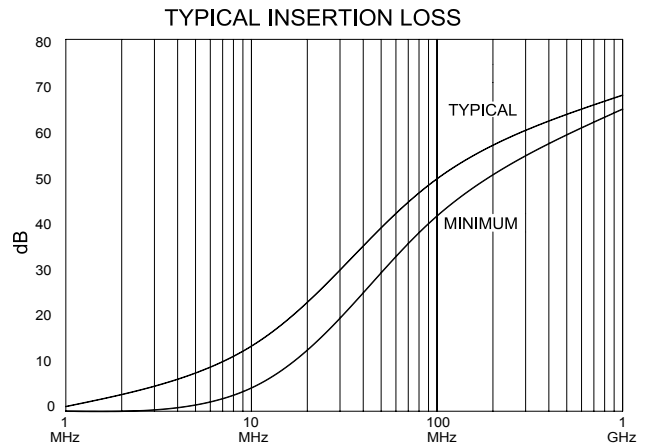

Materials:

Case: Silver Plated Per QQ-S-365A
 Lead: Silver Plated Per QQ-S-365A
 Epoxy Sealed, Both Ends

CALL OUR SALES DEPARTMENT FOR MORE INFORMATION OR VARIATIONS OF THIS PRODUCT.

**Corry Micronics, Inc. One Plastics Rd. - Corry, PA 16407
 (814) 664-7728 Fax (814) 664-4582 www.cormic.com**