



### FTF3-02 RFI FILTER

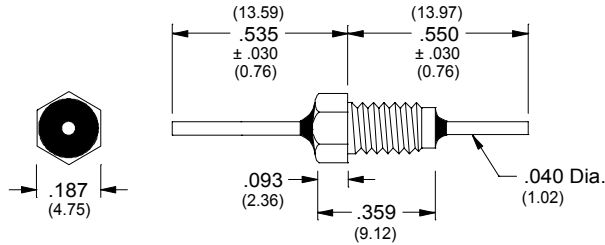


8-32 UNC-2A THREAD  
(X.XX) = MILLIMETERS



Capacitance: 1500 pF Min.  
Dissipation Factor: 5% Max.  
Working Volts DC: 200\*  
Dielectric Withstanding Voltage: 500 VDC, 2 Seconds  
Insulation Resistance @ 25°C : 10 GΩ Min.  
Max. Current: 10 Amps DC  
DC Resistance: .01Ω Max.  
Operating Temperature: -55°C - +125 °C  
Recommend Mounting Torque: 4-6 Inch/Lbs.  
Insertion Loss:

10 MHz	5 dB
100 MHz	42 dB
1Ghz	70 dB

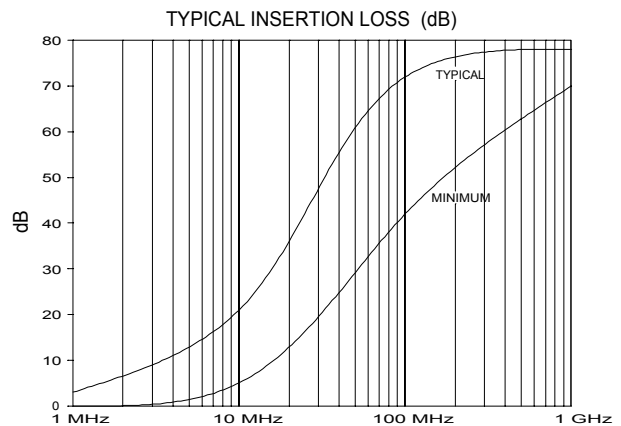

#### Materials:

Case: Silver Plated Per QQ-S-365A  
Lead: Silver Plated Per QQ-S-365A  
Epoxy Sealed, Both Ends

**CALL OUR SALES DEPARTMENT FOR MORE INFORMATION OR VARIATIONS OF THIS PRODUCT.**

**Corry Micronics, Inc. One Plastics Rd. - Corry, PA 16407  
(814) 664-7728 Fax (814) 664-4582 [www.cormic.com](http://www.cormic.com)**

Corry Micronics Inc. herein referred to CMI, believes this information to be accurate, but makes no warranties, expressed or implied as to the accuracy of this document. CMI assumes no liability for any injury, loss, damage, direct or consequential arising from the use of our products. User assumes all risk whatsoever in connection with it's intended use. CMI also reserves the right to change this document without notice.