


# CORRY Micronics

## PRODUCT SPECIFICATION

GF092-01-001

### GLASS SEALED DC FEEDTHRU

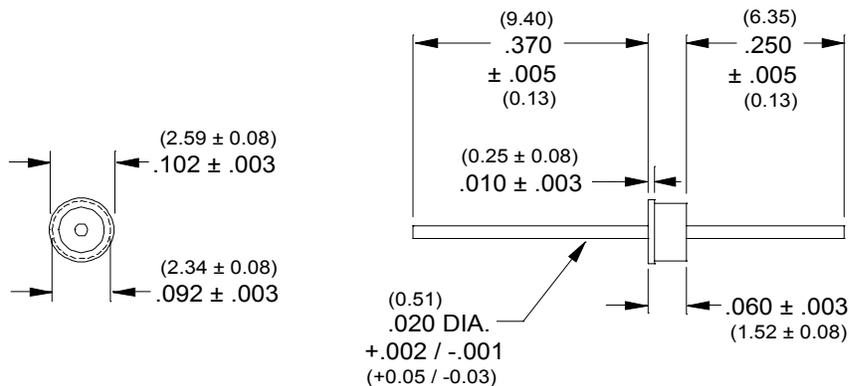

(X.XX = MILLIMETERS)

#### Materials:

Case: Steel  
Lead: Alloy 52  
Finish: Gold Plating per Mil-G-45204C, Type III, Class 0  
Glass: Corning 9013 or Equivalent

Insulation Resistance: 10 GΩ Min.  
Working Voltage: 200 VDC  
Dielectric Withstanding Voltage: 500 VDC  
Maximum Current: 5 Amps  
Operating Temperature: -55°C +125°C  
Hermeticity: < 1 x 10<sup>-8</sup> CC / Sec. Per Mil-Std-202

**CALL OUR SALES DEPARTMENT FOR MORE INFORMATION OR VARIATIONS OF THIS PRODUCT.**

**Corry Micronics, Inc. One Plastics Rd. - Corry, PA 16407  
(814) 664-7728 Fax (814) 664-4582 [www.cormic.com](http://www.cormic.com)**

Corry Micronics Inc. herein referred to CMI, believes this information to be accurate, but makes no warranties, expressed or implied as to the accuracy of this document. CMI assumes no liability for any injury, loss, damage, direct or consequential arising from the use of our products. User assumes all risk whatsoever in connection with it's intended use. CMI also reserves the right to change this document without notice.