



HS42-XX-XXXX HERMETICALLY SEALED FILTERS 50 VDC RATED

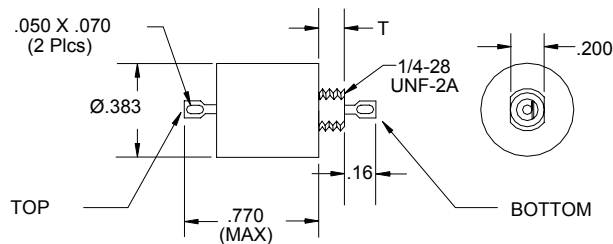

Case: Tin/lead Plated, Hermetically Sealed.
I.R. @ 25 °C: 1000Ω-F Min.
Rated Voltage: 50 vdc
Capacitance: 1.4uF @ 1kHz, 25°C
Operating Temperature: -55 °C - +125 °C



PART NUMBER	I (Amps)	Crkt	DCR (Ohms)	"T"	TYPICAL NO LOAD INSERTION LOSS (dB) @ 25 °C PER MIL-STD-220						
					30 kHz	150 kHz	300 kHz	1 MHz	10 MHz	100 MHz	1 GHz
HS42-11-0001	.5A	LB	.60	.190	16	36	48	69	70	70	70
HS43-21-0001	.5A	LT	.60	.312	16	36	48	69	70	70	70
HS42-11-0001	.5A	LB	.60	.190	16	36	48	69	70	70	70
HS43-21-0001	.5A	LT	.60	.312	16	36	48	69	70	70	70
HS42-11-0101	1.0A	LB	.25	.190	16	33	44	66	70	70	70
HS43-21-0101	1.0A	LT	.25	.312	16	33	44	66	70	70	70
HS42-11-0101	1.0A	LB	.25	.190	16	33	44	66	70	70	70
HS43-21-0101	1.0A	LT	.25	.312	16	33	44	66	70	70	70
HS42-11-0301	3.0A	LB	.06	.190	15	28	34	45	70	70	70
HS43-21-0301	3.0A	LT	.06	.312	15	28	34	45	70	70	70
HS42-11-0301	3.0A	LB	.06	.190	15	28	34	45	70	70	70
HS43-21-0301	3.0A	LT	.06	.312	15	28	34	45	70	70	70
HS42-11-0501	5.0A	LB	.015	.190	15	28	33	46	70	70	70
HS43-211-0501	5.0A	LT	.015	.312	15	28	33	46	70	70	70
HS42-11-0501	5.0A	LB	.015	.190	15	28	33	46	70	70	70
HS43-21-0501	5.0A	LT	.015	.312	15	28	33	46	70	70	70

CALL OUR SALES DEPARTMENT FOR MORE INFORMATION OR VARIATIONS OF THIS PRODUCT.

Corry Micronics, Inc. One Plastic Rd - Corry, PA 16407
(814) 664-7728 Fax (814) 664-4582
www.cormic.com

Micronics Inc. herein referred to CMI, believes this information to be accurate, but makes no warranties, expressed or implied as to the accuracy of this document. CMI assumes no liability for any injury, loss, damage, direct or consequential arising from the use of our products. User assumes all risk whatsoever in connection with it's intended use. CMI also reserves the right to change this document without notice.