



### HS42-XX-XXXX HERMETICALLY SEALED BUTTON FILTERS

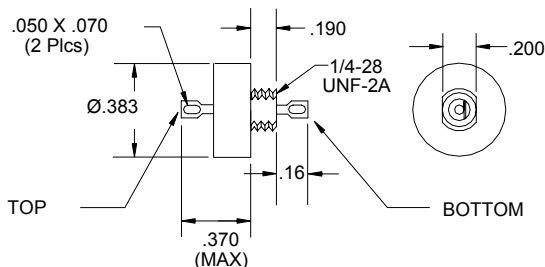

Case: Tin/lead Plated, Hermetically Sealed.  
 I.R. @ 25 °C: 1000Ω-F Min.  
 Rated Voltage: See Table  
 Capacitance @ 1kHz, 25°C: See Table  
 Operating Temperature: -55 °C - +125 °C  
 DCR: 0.010 Ohms (Max)



PART NUMBER	RATED DC VOLTS	RATED AC VOLTS	I (Amps)	Crkt	Cap (uF)	TYPICAL NO LOAD INSERTION LOSS (dB) @ 25 °C PER MIL-STD-220						
						30 kHz	150 kHz	300 kHz	1 MHz	10 MHz	100 MHz	1 GHz
HS42-11-0601	50	-	15A	LB	1.4	15	28	33	44	60	70	70
HS42-11-0602	200	125	15A	LB	.015	-	-	-	6	25	38	50
HS42-11-0603	200	125	15A	LB	.15	-	10	15	25	40	52	60
HS42-11-0604	200	125	15A	LB	.25	4	15	21	31	50	70	70

**CALL OUR SALES DEPARTMENT FOR MORE INFORMATION OR VARIATIONS OF THIS PRODUCT.**

**Corry Micronics, Inc. One Plastics Rd. - Corry, PA 16407**  
**(814) 664-7728 Fax (814) 664-4582 [www.cormic.com](http://www.cormic.com)**

Micronics Inc. herein referred to CMI, believes this information to be accurate, but makes no warranties, expressed or implied as to the accuracy of this document. CMI assumes no liability for any injury, loss, damage, direct or consequential arising from the use of our products. User assumes all risk whatsoever in connection with it's intended use. CMI also reserves the right to change this document without notice.