



HS72-XX-XXXX HERMETICALLY SEALED FILTERS 400 VDC/240 VAC RATED

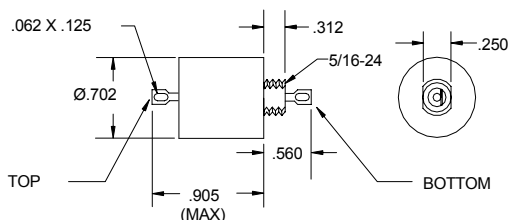

Case: Tin/lead Plated, Hermetically Sealed.
I.R. @ 25 °C: 1000Ω-F Min.
Rated Voltage: 400 vdc/240 vac
Capacitance: .25uF @ 1kHz, 25°C
Operating Temperature: -55 °C - +125 °C



PART NUMBER	I (Amps)	Crkt	DCR (Ohms)	"T"	TYPICAL NO LOAD INSERTION LOSS (dB) @ 25 °C PER MIL-STD-220						
					30 kHz	150 kHz	300 kHz	1 MHz	10 MHz	100 MHz	1 GHz
HS72-21-4001	.5A	LB	.35	.312	4	26	38	60	70	70	70
HS73-21-4001	.5A	LT	.35	.312	4	26	38	60	70	70	70
HS72-21-4101	1.0A	LB	.21	.312	-	21	33	55	70	70	70
HS73-21-4101	1.0A	LT	.21	.312	-	21	33	55	70	70	70
HS72-21-4501	5.0A	LB	.01	.312	-	12	18	30	60	70	70
HS73-21-4501	5.0A	LT	.01	.312	-	12	18	30	60	70	70
HS72-21-4601	10.0A	LB	.005	.312	-	11	16	28	45	60	70
HS73-21-4601	10.0A	LT	.005	.312	-	11	16	28	45	60	70

CALL OUR SALES DEPARTMENT FOR MORE INFORMATION OR VARIATIONS OF THIS PRODUCT.

**Corry Micronics, Inc. One Plastics Rd. - Corry, PA 16407
(814) 664-7728 Fax (814) 664-4582 www.cormic.com**

Micronics Inc. herein referred to CMI, believes this information to be accurate, but makes no warranties, expressed or implied as to the accuracy of this document. CMI assumes no liability for any injury, loss, damage, direct or consequential arising from the use of our products. User assumes all risk whatsoever in connection with it's intended use. CMI also reserves the right to change this document without notice.