

PRODUCT SPECIFICATION

CMSW-SPDTR-1G-5K SPDT REFLECTIVE RF SWITCH

CMSW-SPDTR-1G-5K is a single pole double throw hermetically sealed reflective switch. It operates from 1 GHz to 1.1 GHz at 100 Watts average input power. Peak power handling is 5 kW for a 17 uS / 2% duty cycle pulse.

Electrical Specifications

Eroguenov Pongo	1 1 1 0 4
Frequency Range	1-1.1 GHz
Power	5KW Peak
Average Power	100 W
Insertion Loss	0.8 dB Max
Isolation	40 dB Min
VSWR	1.5:1
Duty Cycle	2%
Pulse Width	17 uS
PRF	600 Hz
Switching Speed	250 nS Typ. (50% TTL to 10%/90% RF)
Switching Rate	2 KHz
Power Supply	+50V @ 50mA, +5V @ 350mA
Control	TTL
RF Connectors	TNC Female
Power/Control Interface Connector	9 Pin Micro D-Sub Female
Hot Switching*	No
Cold Switching	Yes

^{*} Hot Switching will cause damage, Cold Switching only

CALL OUR SALES DEPARTMENT FOR MORE INFORMATION OR VARIATIONS OF THIS PRODUCT.

Corry Micronics, Inc. One Plastics Rd. - Corry, PA 16407 (724) 940-7556 ext. 138 Fax (724) 940-7707 www.cormic.com



PRODUCT SPECIFICATION

Mechanical / Environmental Specifications

Housing Material	Aluminum
Finish	Blue Epoxy Polyamide Coating, No Paint on Mounting Surface
Sealing	Hermetic
Dimensions	4.22 x 2.98 x 0.70 Inches
Temperature (Base Plate)	Operating: -45C to +85C Storage: -54C to +125C

Logic Table

TTL Level	State
Low	J1 to J2
High	J1 to J3

Interface Connector Pin Out

Pin #	Function
1	+50 VDC
2	No Connect
3	No Connect
4	+5 VDC
5	TTL Control Signal
6	Ground
7	Ground
8	Ground
9	Ground

CALL OUR SALES DEPARTMENT FOR MORE INFORMATION OR VARIATIONS OF THIS PRODUCT.


Corry Micronics, Inc. One Plastics Rd. - Corry, PA 16407



PRODUCT SPECIFICATION

CMSW-SPDTR-1G-5K SPDT REFLECTIVE RF SWITCH

Mechanical Drawing

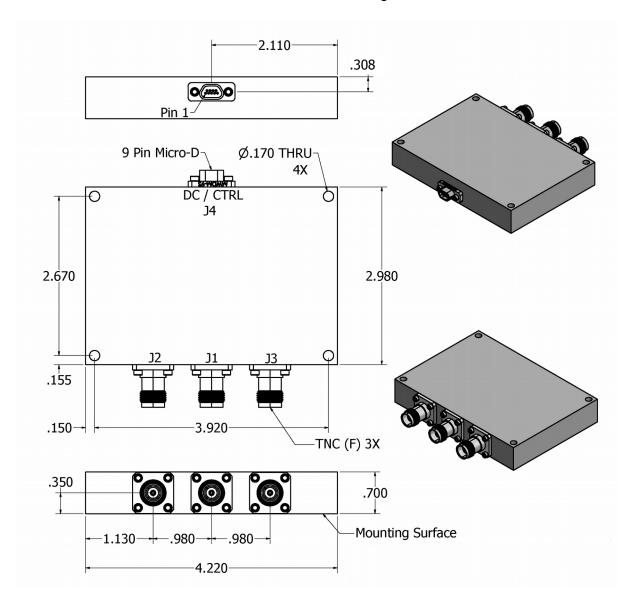

CALL OUR SALES DEPARTMENT FOR MORE INFORMATION OR VARIATIONS OF THIS PRODUCT.

Corry Micronics, Inc. One Plastics Rd. - Corry, PA 16407

(724) 940-7556 ext. 138 Fax (724) 940-7707 www.cormic.com

Corry Micronics Inc. herein referred to CMI, believes this information to be accurate, but makes no warranties, expressed or implied as to the accuracy of this document. CMI assumes no liability for any injury, loss, damage, direct or consequential arising from the use of our products. User assumes all risk whatsoever in connection with it's intended use. CMI also reserves the right to change this document without notice. 11/29/16