

Part Number: CMIBPF-1438


Electrical specifications:

No.	Parameter	Minimum	typical	Maximum	Units
1	Frequency Range	1.4279	-	1.4479	GHz
2	Insertion Loss	-	-	1.0	dB
3	Pass band Ripple	-	-	0.25	dB
4	VSWR	-	-	1.3	-
5	Rejection	>60dBc @1.4759-1.4959 GHz			-
6	IP3	-----			dB m
7	Power Handling	-	-	10	Watts
8	Impedance	-	50	-	Ω
9	Operating Temperature	-25	-	+65	$^{\circ}\text{C}$
10	Finish	Black Paint			

Outline Drawing:

All Dimensions in mm

All Connectors: SMA-Female

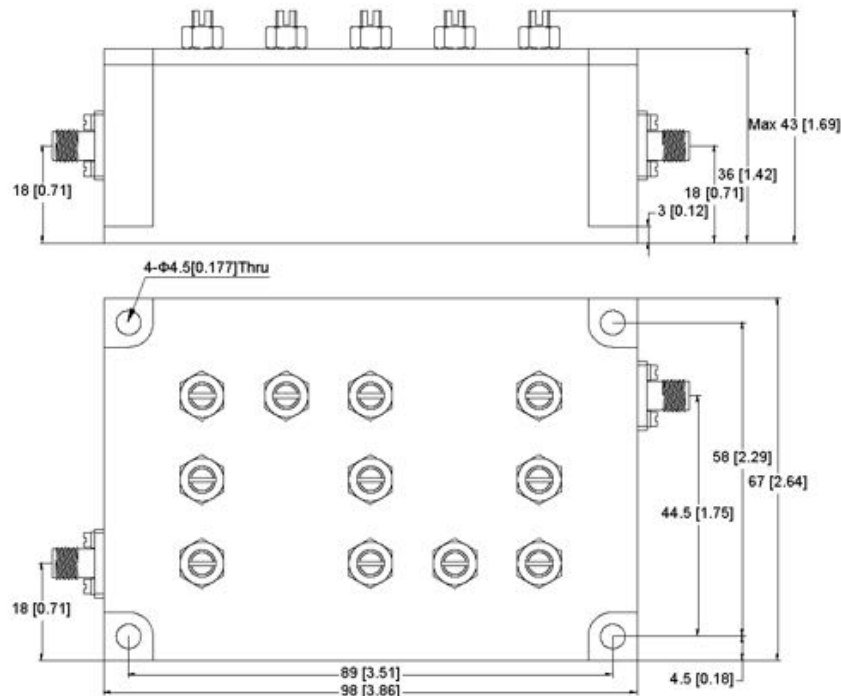

CALL OUR SALES DEPARTMENT FOR MORE INFORMATION OR VARIATIONS OF THIS PRODUCT.

Corry Micronics, Inc. One Plastics Rd. - Corry, PA 16407
(814) 664-7728 Fax (814) 664-4582 www.cormic.com

Corry Micronics Inc. herein referred to CMI, believes this information to be accurate, but makes no warranties, expressed or implied as to the accuracy of this document. CMI assumes no liability for any injury, loss, damage, direct or consequential arising from the use of our products. User assumes all risk whatsoever in connection with it's intended use. CMI also reserves the right to change this document without notice.