


**LBTX-BPF-7  
BAND 7 FILTER**

Passband	2620 - 2690 MHz
Passband Insertion Loss	0.7 dB max
Pass Band Return Loss	16.0 dB min
Rejection	50 dB min @ DC to 2570 MHz 60 dB min @ 2F <sub>o</sub> 50 dB min @ 3F <sub>o</sub>
Power Handling	30 W max
Peak Power (0.1% duty cycle)	100 W max
Operating Temperature	-40°C to +50°C
Finish	Black Paint
Connectors	SMA, Female

All dimensions in mm

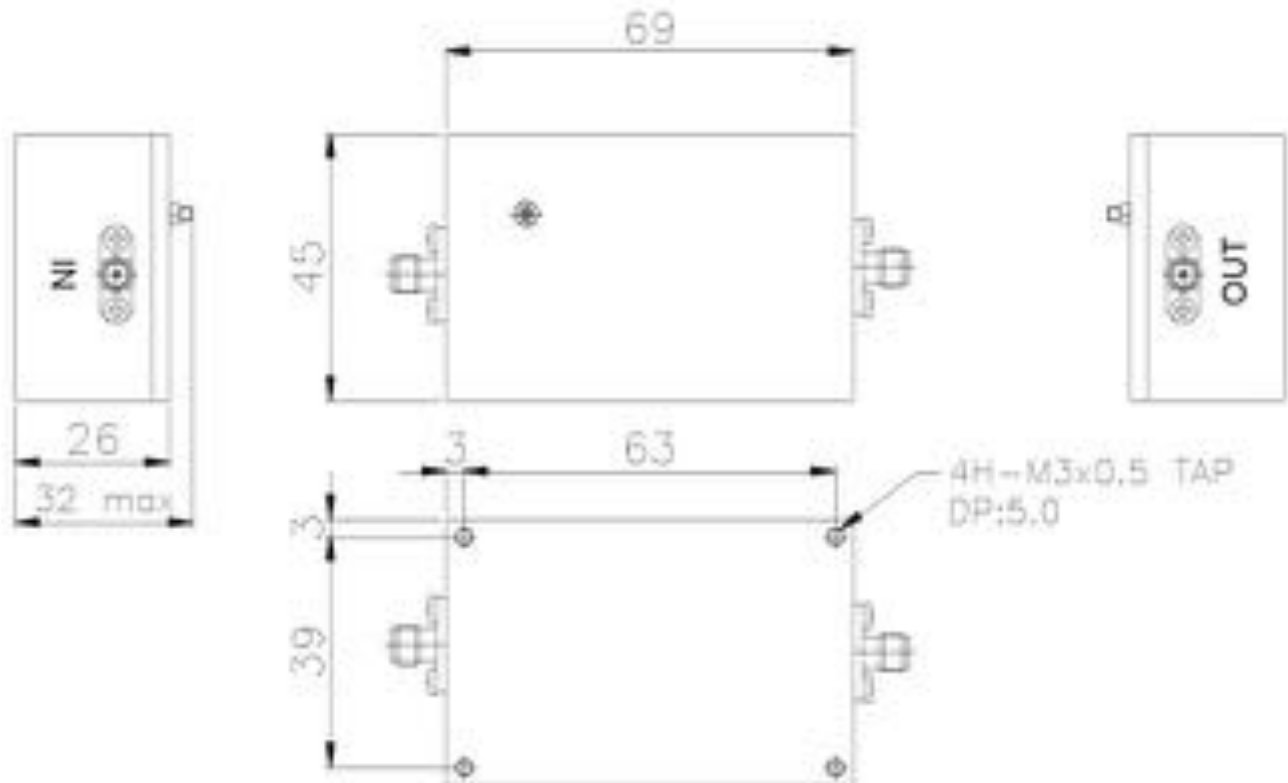

**CALL OUR SALES DEPARTMENT FOR MORE INFORMATION OR VARIATIONS OF THIS PRODUCT.**

**Corry Micronics, Inc. One Plastics Rd. - Corry, PA 16407**

**(724) 940-7556 ext. 138 Fax (724) 940-7707 [www.cormic.com](http://www.cormic.com)**

Corry Micronics Inc. herein referred to CMI, believes this information to be accurate, but makes no warranties, expressed or implied as to the accuracy of this document. CMI assumes no liability for any injury, loss, damage, direct or consequential arising from the use of our products. User assumes all risk whatsoever in connection with it's intended use. CMI also reserves the right to change this document without notice. 3/14/17