




CORRY MICRONICS, INC PRODUCT SPECIFICATION


CMIATT-4CH-200W
4 Channel 100 Watt Attenuator

Electrical Specifications


Frequency Range	DC to 6GHz
Attenuation	50 dB
Attenuation Accuracy	±1.75 dB
Power Handling	100W per Channel Max
Impedance	50 Ω
RF Input / Output Connectors	N-Female
Operating Temperature	0° to 35°C
Power Input	115/230 VAC, 50/60Hz
Size	3U, 19" Rack Mount Enclosure

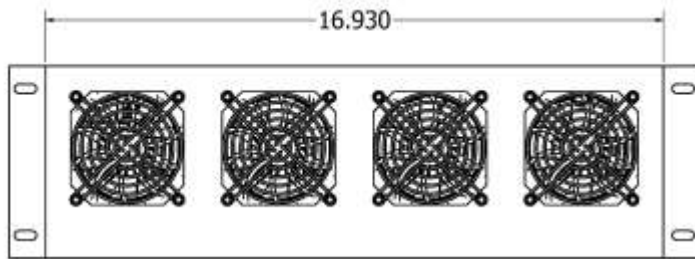

BACK

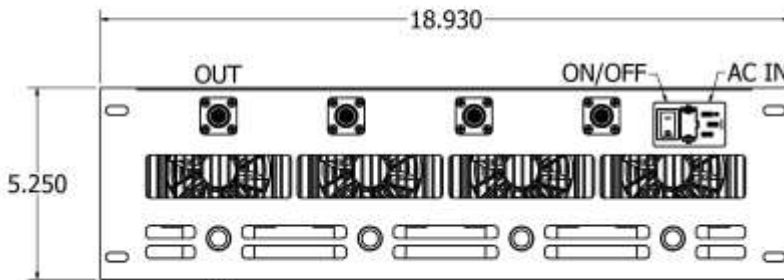

FRONT

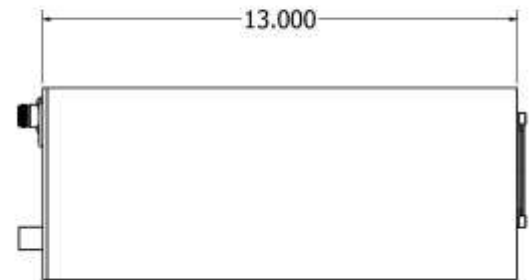

CALL OUR SALES DEPARTMENT FOR MORE INFORMATION OR VARIATIONS OF THIS PRODUCT.

Corry Micronics, Inc. One Plastics Rd. - Corry, PA 16407
(724) 940-7556 ext. 138 Fax (724) 940-7707 www.cormic.com

Corry Micronics Inc. herein referred to CMI, believes this information to be accurate, but makes no warranties, expressed or implied as to the accuracy of this document. CMI assumes no liability for any injury, loss, damage, direct or consequential arising from the use of our products. User assumes all risk whatsoever in connection with its intended use. CMI also reserves the right to change this document without notice. 8/16/2017