


CMILNA-00531F25 5-3100 MHz LOW NOISE AMPLIFIER

Electrical Specifications

Parameters	Specifications	
Frequency Range	5~3100MHz	
Gain	≥17dB	
Noise Figure	≤2.5dB	
Gain Flatness	≤±1dB	
VSWR	≤2.0:1	
P1dB	≥18dBm	
OIP3	35dBm	
Power Supply	+8V/100mA	
Port Connectors	SMA-Female	
Operating Temp.	-20°C~+70°C	
Surface Finish	Natural color conductive oxidation	

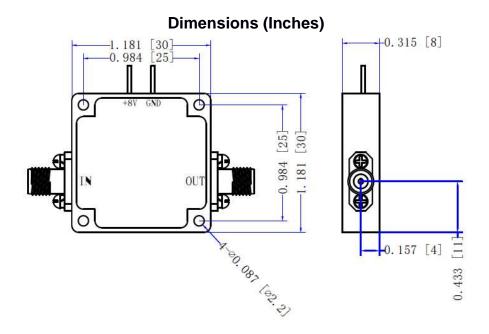

CALL OUR SALES DEPARTMENT FOR MORE INFORMATION OR VARIATIONS OF THIS PRODUCT.

Corry Micronics, Inc. One Plastics Rd. - Corry, PA 16407 (724) 940-7556 ext. 138 Fax (724) 940-7707 *www.cormic.com*

Corry Micronics Inc. herein referred to CMI, believes this information to be accurate, but makes no warranties, expressed or implied as to the accuracy of this document. CMI assumes no liability for any injury, loss, damage, direct or consequential arising from the use of our products. User assumes all risk whatsoever in connection with it's intended use. CMI also reserves the right to change this document without notice. 03/08/2017