


CMILNA-2030F10 2-3 GHz LOW NOISE AMPLIFIER

Electrical Specifications

Parameters	Specifications	
Frequency Range	2~3GHz	
Gain	≥35dB	
Gain Flatness	≤±1dB	
Noise Figure	≤1.0dB	
VSWR	≤1.6:1	
P1dB	≥10dBm	
Power Supply	+5V/100mA	
Port Connectors	SMA-Female	
Operating Temp.	-40°C~+70°C	
Surface Finish	Natural color conductive oxidation	

Dimensions (Inches)

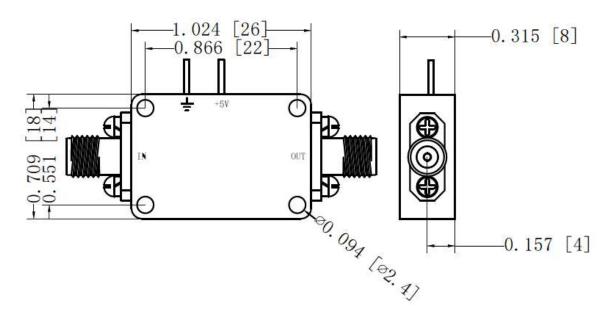

CALL OUR SALES DEPARTMENT FOR MORE INFORMATION OR VARIATIONS OF THIS PRODUCT.

Corry Micronics, Inc. One Plastics Rd. - Corry, PA 16407 (724) 940-7556 ext. 138 Fax (724) 940-7707 *www.cormic.com*

Corry Micronics Inc. herein referred to CMI, believes this information to be accurate, but makes no warranties, expressed or implied as to the accuracy of this document. CMI assumes no liability for any injury, loss, damage, direct or consequential arising from the use of our products. User assumes all risk whatsoever in connection with it's intended use. CMI also reserves the right to change this document without notice. 03/08/2017