

CMIPA-L18P2 1785-1805 MHz LTE-TDD SOLID STATE HIGH POWER AMPLIFIER

Electrical Specifications

Parameters	Specifications
Operating Frequency	1785-1805MHz
Signal Type	LTE, PAR 8dB, 5-10MHz
TX input power	0dBm
TX output power	≥33dBm
TX gain flatness	≤±0.8dB
TX VSWR	≤1.5
TX on/off time	≤2us
RX noise figure	≤2.2dB(Room temperature) ≤3dB(TAT)
RX gain	≥25dB (Room temperature)
RX gain flatness	≤±0.8dB
RX VSWR	≤1.5
Switch time	≤2us
Power Supply	+28V

Environmental Specifications

♦ Environment Temp.: -25°C ~ +55°C


♦ Humidity: 5%RH~96%RH

♦ Atmospheric Pressure: 70kPa~106kPa

CALL OUR SALES DEPARTMENT FOR MORE INFORMATION OR VARIATIONS OF THIS PRODUCT.

Corry Micronics, Inc. One Plastics Rd. - Corry, PA 16407 (724) 940-7556 ext. 138 Fax (724) 940-7707 www.cormic.com

Dimensions (Inches)

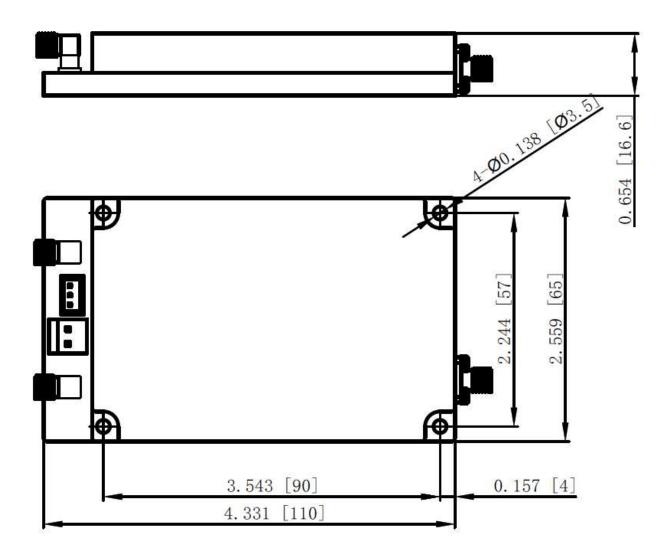

CALL OUR SALES DEPARTMENT FOR MORE INFORMATION OR VARIATIONS OF THIS PRODUCT.

Corry Micronics, Inc. One Plastics Rd. - Corry, PA 16407