



CORRY MICRONICS, INC PRODUCT SPECIFICATION

CMIPA-L18P45 1805-1880 MHz LTE SOLID STATE HIGH POWER AMPLIFIER

Electrical Specifications

Parameters	Specifications	Note
Operating Frequency	1805-1880MHz	
Signal Type	LTE, PAR 9.8dB	
Nominal Output Power	45W	
ACLR	$\leq -45\text{dBc}$	
EVM (Max)	$<8\%$ @ Specified Output Power	
Nominal Gain	51dB	
Gain with ALC off +/- 1 dB	$51 \pm 1.5\text{dB}$	Room temperature Value of attenuator 8.5dB
	$51 \pm 2\text{dB}$	Low and high temperature Value of attenuator 8.5dB
Input return loss	18dB	
Output return loss	18dB	
Tx ALC control range vs. Tx input level change, Min.	16 dB (Nominal input +/-8dB)	
ALC set range	16dB (46.5dBm~31.5dBm)	
ALC set step	0.5dB	
ALC Control Accuracy	$\pm 1\text{ dB}$	
Attenuator Set Range	31dB	ALC OFF
Attenuator Set Step	0.25dB	ALC OFF
Initial value of attenuator	8.5dB	
Max input level, no damage and degradation	0dBm	Adjust the attenuator to maintain output power
Noise Figure	$\leq 10\text{dB}$	ALC OFF
DC Power	+28V	

CALL OUR SALES DEPARTMENT FOR MORE INFORMATION OR VARIATIONS OF THIS PRODUCT.

Corry Micronics, Inc. One Plastics Rd. - Corry, PA 16407
(724) 940-7556 ext. 138 Fax (724) 940-7707 www.cormic.com

Corry Micronics Inc. herein referred to CMI, believes this information to be accurate, but makes no warranties, expressed or implied as to the accuracy of this document. CMI assumes no liability for any injury, loss, damage, direct or consequential arising from the use of our products. User assumes all risk whatsoever in connection with it's intended use. CMI also reserves the right to change this document without notice. 03/08/2017

Parameters	Specifications	Note
Efficiency	≥25%@45W	
Output load mismatch tolerance	Isolator protected	
Max operating base temperature	90°C	If temp higher than 90°C, the PA will be shut down
Power consumption when muted	<5W	
Forward power monitor	Range: 30dB, 50dBm~21dBm Resolution: 0.1dBm Accuracy: ±2dB	
Reverse power monitor	Range: 30dB, 50dBm~21dBm Resolution: 0.1dBm Accuracy: ±2dB	
DC Current monitor	Range: 0-15A Resolution: 0.1A Accuracy: ±5%	
Temperature monitor	Range: -40°C~+105°C Resolution: 1°C Accuracy: ±3°C	

Environmental Specifications


- ✧ Environment Temp.: 0°C ~ +50°C
- ✧ Humidity: 5%RH~96%RH
- ✧ Atmospheric Pressure: 70kPa~106kPa

CALL OUR SALES DEPARTMENT FOR MORE INFORMATION OR VARIATIONS OF THIS PRODUCT.

Corry Micronics, Inc. One Plastics Rd. - Corry, PA 16407
(724) 940-7556 ext. 138 Fax (724) 940-7707 www.cormic.com

Corry Micronics Inc. herein referred to CMI, believes this information to be accurate, but makes no warranties, expressed or implied as to the accuracy of this document. CMI assumes no liability for any injury, loss, damage, direct or consequential arising from the use of our products. User assumes all risk whatsoever in connection with it's intended use. CMI also reserves the right to change this document without notice. 03/08/2017

Dimensions (Inches)

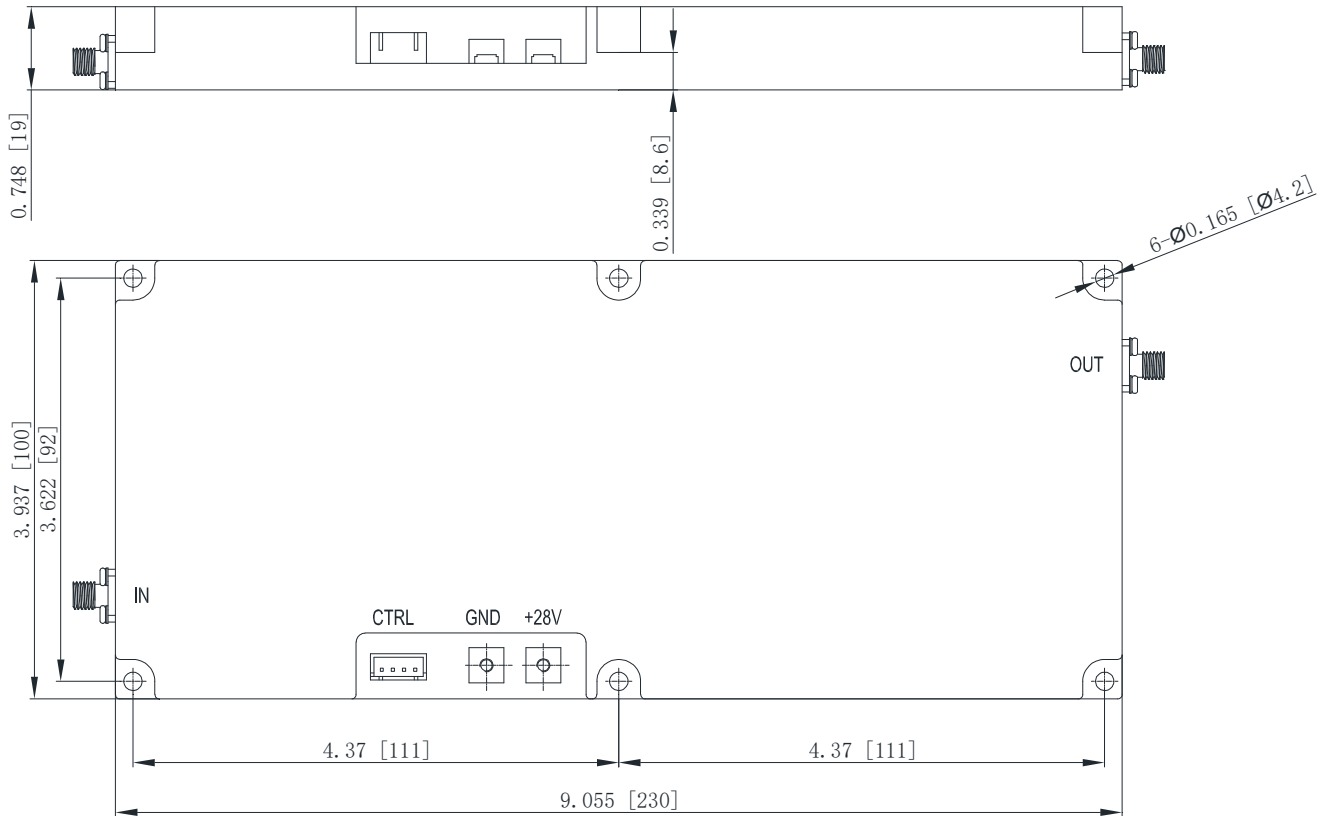

CALL OUR SALES DEPARTMENT FOR MORE INFORMATION OR VARIATIONS OF THIS PRODUCT.

Corry Micronics, Inc. One Plastics Rd. - Corry, PA 16407
(724) 940-7556 ext. 138 Fax (724) 940-7707 www.cormic.com

Corry Micronics Inc. herein referred to CMI, believes this information to be accurate, but makes no warranties, expressed or implied as to the accuracy of this document. CMI assumes no liability for any injury, loss, damage, direct or consequential arising from the use of our products. User assumes all risk whatsoever in connection with it's intended use. CMI also reserves the right to change this document without notice. 03/08/2017