

CMIPA-L23P10 2300-2400 MHz LTE-TDD SOLID STATE HIGH POWER AMPLIFIER

Electrical Specifications

Parameters	Specifications
Operating Frequency	2300-2400MHz
Signal Type	LTE-TDD, PAR 8dB
Output power	≥40dBm
ACLR	≤-40dBc
TX gain	≥50dB
Transmit gain flatness	≤±0.6dB
Transmit Input return loss	≤1.5
RX NF	≤3dB
RX gain	≥25dB
Receive gain flatness	≤±0.6dB
Receive Input return loss	≤2
Switch time	≤2us
Power Supply	+28V

Environmental Specifications

♦ Environment Temp.: 0°C ~ +50°C


♦ Humidity: 5%RH~96%RH

♦ Atmospheric Pressure: 70kPa~106kPa

CALL OUR SALES DEPARTMENT FOR MORE INFORMATION OR VARIATIONS OF THIS PRODUCT.

Corry Micronics, Inc. One Plastics Rd. - Corry, PA 16407 (724) 940-7556 ext. 138 Fax (724) 940-7707 www.cormic.com

Dimensions (inches)

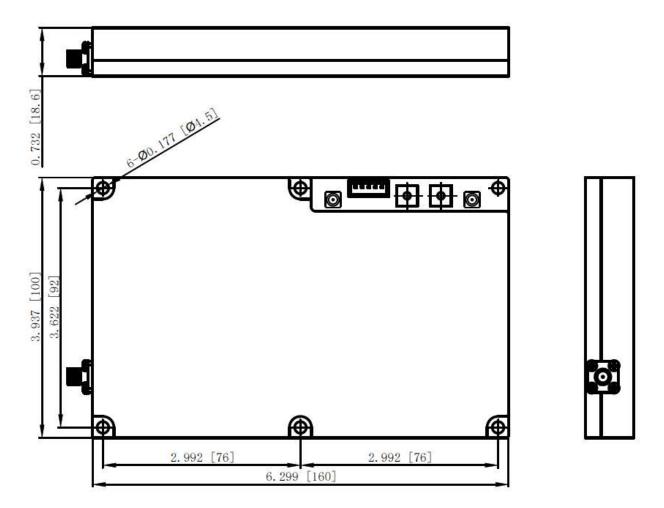

CALL OUR SALES DEPARTMENT FOR MORE INFORMATION OR VARIATIONS OF THIS PRODUCT.

Corry Micronics, Inc. One Plastics Rd. - Corry, PA 16407

CALL OUR SALES DEPARTMENT FOR MORE INFORMATION OR VARIA	TIONS OF THIS PRODUCT.
Corry Micronics, Inc. One Plastics Rd Corry, P. (724) 940-7556 ext. 138 Fax (724) 940-7707 with the control of the control	

	Dimensions (Inches)
CALL OUR SALES DEPARTMENT FOR	R MORE INFORMATION OR VARIATIONS OF THIS PRODUCT.