




CORRY MICRONICS, INC PRODUCT SPECIFICATION

CMIBF-708X763-1

Cavity Filter

Parameters	Specifications
Frequency Range	703~713MHz&758~768MHz
Insertion Loss	≤1.5dB
Return Loss	≥18dB
Rejection	≥50dB @ 600~693MHz ≥50dB @ 723~748MHz ≥50dB @ 778~803MHz
PIM3	≤-150dBc @ 2*43dBm
Power Handling	100W
Connectors	DIN-Female
Ports Impedance	50 Ω
Operating Temperature	-20°C ~ +60°C
Surface Finish	Black Paint
Ingress Protection	IP66
Configuration	As Below (Dimensions: Inches[mm])
Weight	5.5 lbs.

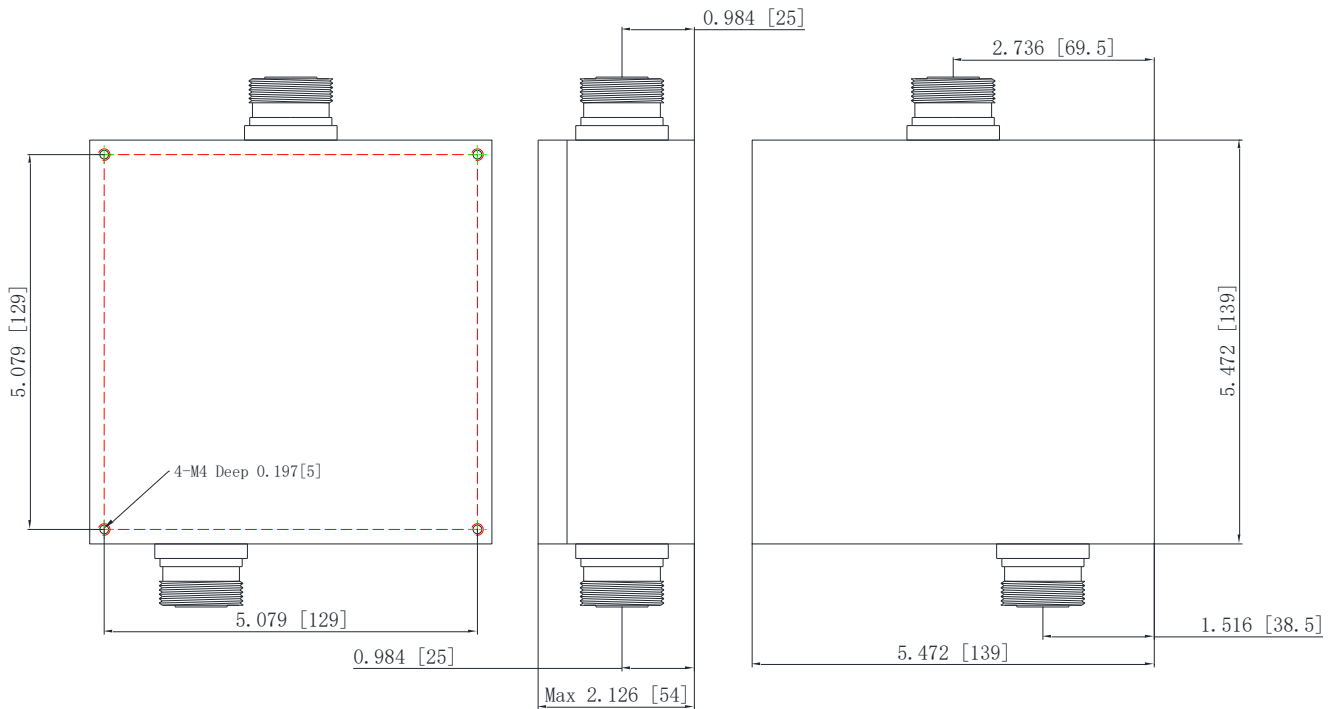

CALL OUR SALES DEPARTMENT FOR MORE INFORMATION OR VARIATIONS OF THIS PRODUCT.

Corry Micronics, Inc. One Plastics Rd. - Corry, PA 16407

(724) 940-7556 ext. 138 Fax (724) 940-7707 www.cormic.com

Corry Micronics Inc. herein referred to CMI, believes this information to be accurate, but makes no warranties, expressed or implied as to the accuracy of this document. CMI assumes no liability for any injury, loss, damage, direct or consequential arising from the use of our products. User assumes all risk whatsoever in connection with its intended use. CMI also reserves the right to change this document without notice. 6/22/2018