




CORRY MICRONICS, INC PRODUCT SPECIFICATION

CMIBF-L7-1 Cavity Dual Band Pass Filter

Parameter	Specification	
	UPLINK	DOWNLINK
Frequency Range	698~716MHz	728~746MHz
Insertion Loss	≤2.9dB	≤2.9dB
Ripple	≤1.5dB @ Room Temperature ≤1.8dB @ 0°C~40°C Temperature Variation	
VSWR	≤1.3:1	≤1.3:1
Rejection	≥70dB@728~746MHz	≥70dB@698~716MHz
Isolation	≥70dB@650~800MHz	
Temp. Range	0~40°C	
Connectors	N-Female; SMA-Female	
Input Power	50W	
Ports Impedance	50 OHMS	
Surface Finish	Black Paint	
Dimensions	See attached drawing (<i>Dimensions are in Inches[mm]</i>)	

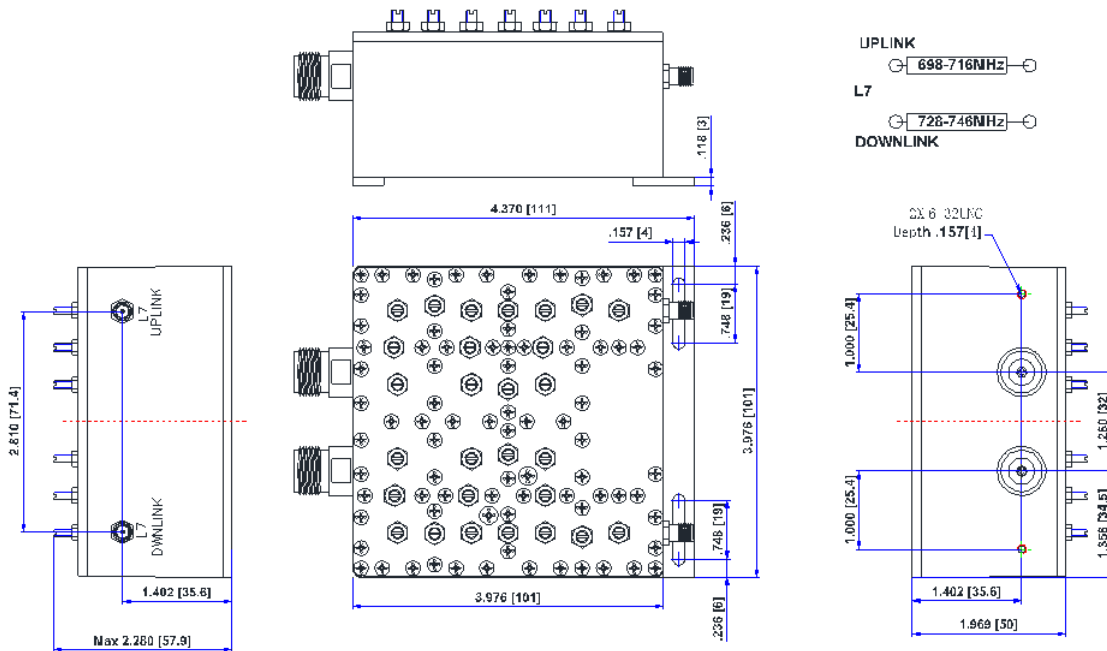

CALL OUR SALES DEPARTMENT FOR MORE INFORMATION OR VARIATIONS OF THIS PRODUCT.

Corry Micronics, Inc. One Plastics Rd. - Corry, PA 16407
(724) 940-7556 ext. 138 Fax (724) 940-7707 www.cormic.com

Corry Micronics Inc. herein referred to CMI, believes this information to be accurate, but makes no warranties, expressed or implied as to the accuracy of this document. CMI assumes no liability for any injury, loss, damage, direct or consequential arising from the use of our products. User assumes all risk whatsoever in connection with its intended use. CMI also reserves the right to change this document without notice. 6/22/2018