



# CORRY MICRONICS, INC PRODUCT SPECIFICATION


## CMIAT-0030A\*\*P50N

### Fixed Attenuator

#### Electrical Specifications

Parameters	Specifications
Frequency Band	DC-3.0GHz
VSWR	≤1.20:1
Attenuation	1/3/6/10/15/20/30/40/50/60 dB
Attenuation Accuracy	±0.5 dB (For 1/3/6 dB); ±0.8 dB(For 10 dB); ±1.0 dB (For 15/20/30 dB); ±2.0 dB (For 40 dB); ±2.5 dB (For 50 dB); ±3.0 dB (For 60 dB)
Power Handling	50W CW
Port Connectors	Input Port: N-Male / Output Port: N-Female
Temp. Range	-55°C~+125°C
Weight	0.99 lbs. [0.45kg]

#### Outline Drawing

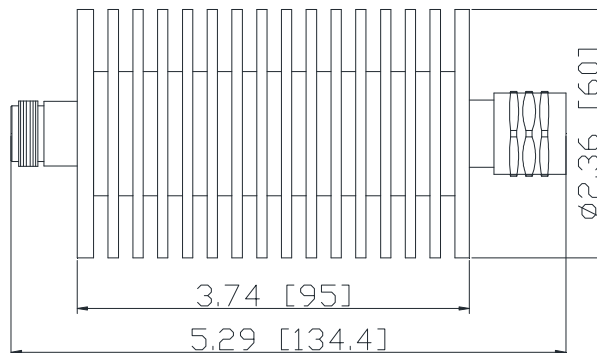

Product Model	Attenuation	Accuracy
CMIAT-0030A**P50N	**dB	±***dB
CMIAT-0030A1P50N	1 dB	±0.5 dB
CMIAT-0030A3P50N	3 dB	±0.5 dB
CMIAT-0030A6P50N	6 dB	±0.5 dB
CMIAT-0030A10P50N	10 dB	±0.8 dB
CMIAT-0030A15P50N	15 dB	±1.0 dB
CMIAT-0030A20P50N	20 dB	±1.0 dB
CMIAT-0030A30P50N	30 dB	±1.0 dB
CMIAT-0030A40P50N	40 dB	±2.0 dB
CMIAT-0030A50P50N	50 dB	±2.5 dB
CMIAT-0030A60P50N	60 dB	±3.0 dB

**CALL OUR SALES DEPARTMENT FOR MORE INFORMATION OR VARIATIONS OF THIS PRODUCT.**

**Corry Micronics, Inc. One Plastics Rd. - Corry, PA 16407**  
**(724) 940-7556 ext. 138 Fax (724) 940-7707 [www.cormic.com](http://www.cormic.com)**

Corry Micronics Inc. herein referred to CMI, believes this information to be accurate, but makes no warranties, expressed or implied as to the accuracy of this document. CMI assumes no liability for any injury, loss, damage, direct or consequential arising from the use of our products. User assumes all risk whatsoever in connection with its intended use. CMI also reserves the right to change this document without notice. 08/02/2018