



CORRY MICRONICS, INC PRODUCT SPECIFICATION


CMIAT-03A**P200N

Fixed Attenuator

Electrical Specifications

Parameters	Specifications
Frequency Band	DC-3.0 GHz
VSWR	≤1.20:1
Attenuation	3/6/10/20/30/40/50/60 dB
Attenuation Accuracy	±0.6 dB (For 3/6 dB); ±0.7 dB(For 10 dB); ±1.0 dB (For 20 dB); ±1.5 dB (For 30 dB); ±2.0 dB (For 40 dB); ±2.5 dB (For 50 dB) ±3.0 dB (For 60 dB)
Power Handling	200W CW
Port Connectors	Input Port: N-Male / Output Port: N-Female
Temp. Range	-55°C~+125°C
Weight	2.43 lbs. [1.1 kg]
Dimensions	See Attached Drawing (Dimensions are in inches [mm])

Outline Drawing

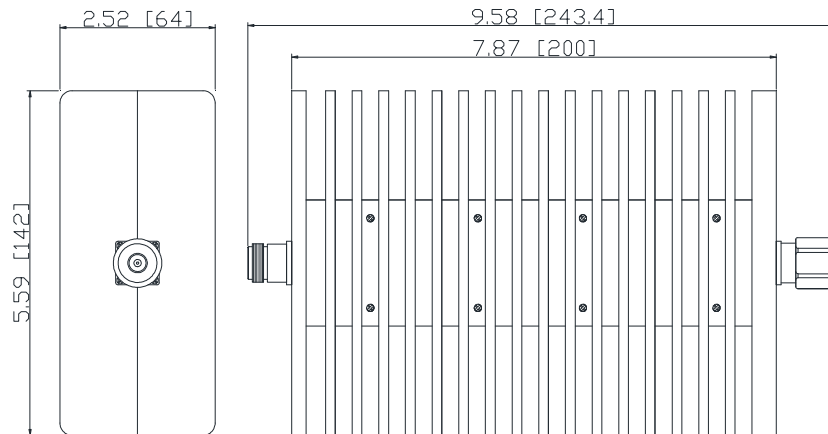

Product Model	Attenuation	Accuracy
CMIAT-03A**P200N	**dB	±***dB
CMIAT-03A3P200N	3 dB	±0.6 dB
CMIAT-03A6P200N	6 dB	±0.6 dB
CMIAT-03A10P200N	10 dB	±0.7 dB
CMIAT-03A20P200N	20 dB	±1.0 dB
CMIAT-03A30P200N	30 dB	±1.5 dB
CMIAT-03A40P200N	40 dB	±2.0 dB
CMIAT-03A50P200N	50 dB	±2.5 dB
CMIAT-03A60P200N	60 dB	±3.0 dB

CALL OUR SALES DEPARTMENT FOR MORE INFORMATION OR VARIATIONS OF THIS PRODUCT.

Corry Micronics, Inc. One Plastics Rd. - Corry, PA 16407
(724) 940-7556 ext. 138 Fax (724) 940-7707 www.cormic.com

Corry Micronics Inc. herein referred to CMI, believes this information to be accurate, but makes no warranties, expressed or implied as to the accuracy of this document. CMI assumes no liability for any injury, loss, damage, direct or consequential arising from the use of our products. User assumes all risk whatsoever in connection with its intended use. CMI also reserves the right to change this document without notice. 08/02/2018