

## CMISPDT-0912P800R Single Pull Double Throw RF Switch

**Electrical Specifications** 

| Parameters               | Specification                               |  |
|--------------------------|---|--|
| Switch Type              | Reflective                                  |  |
| Frequency Range          | 960 ~ 1215 MHz                              |  |
| Insertion Loss           | ≤0.6 dB                                     |  |
| VSWR                     | ≤1.3:1                                      |  |
| Isolation                | ≥23 dB                                      |  |
| Max Input Power          | Peak 800 W (Duty Cycle 2%, Pulse Width 1µs) |  |
| Switching Speed          | ≤1 ns                                       |  |
| Power Supply             | +5 V ±5% (150 mA), -40 V ±5% (50 mA)        |  |
| Control Logic            | TTL   |  |
| Operating Temperature    | -55° C ~ +85° C                             |  |
| Input / Output Connector | Ø 0.5 needle                                |  |
| Surface Finish           | Natural Color Conductive Oxidation          |  |
| Dimensions               | See Attached Drawing (Dimensions are in mm) |  |


| Truth Table |          |          |
|-------------|----------|----------|
| TTL         | J0 to J1 | J0 to J2 |
| 1           | On       | Off      |
| 0           | Off      | On       |

CALL OUR SALES DEPARTMENT FOR MORE INFORMATION OR VARIATIONS OF THIS PRODUCT.

Corry Micronics, Inc. One Plastics Rd. - Corry, PA 16407 (724) 940-7556 ext. 138 Fax (724) 940-7707 www.cormic.com Corry Micronics Inc. herein referred to CMI, believes this information to be accurate, but makes no warranties, expressed or implied as to the accuracy of this document. CMI assumes no liability for any injury, loss, damage, direct or consequential arising from the use of our products. User assumes all risk whatsoever in connection with its intended use. CMI also reserves the right to change this document without notice. 06/21/2019



## **Outline Drawing:**

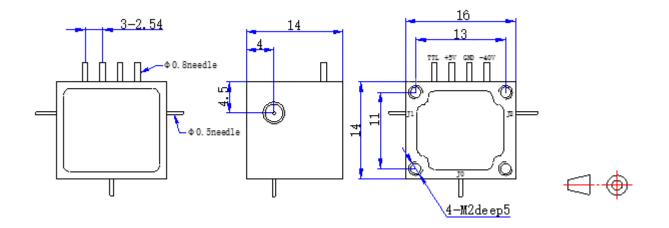

CALL OUR SALES DEPARTMENT FOR MORE INFORMATION OR VARIATIONS OF THIS PRODUCT.

Corry Micronics, Inc. One Plastics Rd. - Corry, PA 16407 (724) 940-7556 ext. 138 Fax (724) 940-7707 www.cormic.com Corry Micronics Inc. herein referred to CMI, believes this information to be accurate, but makes no warranties, expressed or implied as to the accuracy of this document. CMI assumes no liability for any injury, loss, damage, direct or consequential arising from the use of our products. User assumes all risk whatsoever in connection with its intended use. CMI also reserves the right to change this document without notice. 06/21/2019