



CORRY MICRONICS, INC PRODUCT SPECIFICATION

CMISPST-0440P02R Single Pole Single Throw Switch


Electrical Specifications

Parameters	Specification
Switch Type	Reflective
Frequency Range	0.4 ~ 4 GHz
Insertion Loss	≤1.5 dB
VSWR	≤1.5:1
Isolation	≥80 dB
Max Input Power	Peak 0.2 W
Switching Speed	≤50 ns
Power Supply	+5 V (50 mA), -5 V (50 mA)
Control Logic	TTL
Operating Temperature	-55° C ~ +85° C
Input / Output Connector	SMA - Female
Surface Finish	Natural Color Conductive Oxidation
Dimensions	See Attached Drawing (Dimensions are in mm)

Truth Table

C1	J0 to J1
1	Off
0	On

Outline Drawing:

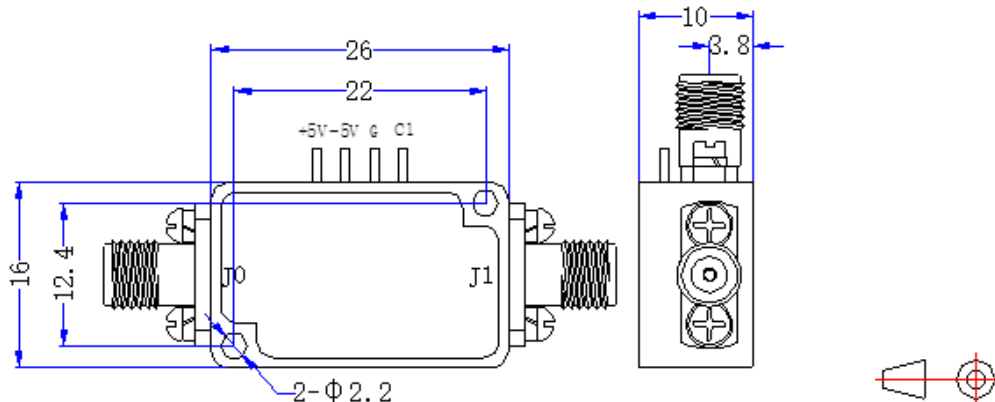

CALL OUR SALES DEPARTMENT FOR MORE INFORMATION OR VARIATIONS OF THIS PRODUCT.

Corry Micronics, Inc. One Plastics Rd. - Corry, PA 16407
(724) 940-7556 ext. 138 Fax (724) 940-7707 www.cormic.com

Corry Micronics Inc. herein referred to CMI, believes this information to be accurate, but makes no warranties, expressed or implied as to the accuracy of this document. CMI assumes no liability for any injury, loss, damage, direct or consequential arising from the use of our products. User assumes all risk whatsoever in connection with its intended use. CMI also reserves the right to change this document without notice. 06/24/2019