



CORRY MICRONICS, INC PRELIMINARY SPECIFICATION

CMIBF-915-30MP
Plastic Light Weight Cavity Filter

Electrical Specifications

Frequency Range	902 – 928 MHz
Pass Band Ripple	≤ 0.5 dB
Insertion Loss	≤ 0.8 dB
VSWR	≤ 1.4:1
Rejection	DC~650 MHz = ≥ 60 dB 650MHz~750 MHz = ≥ 40 dB 1050MHz~1250MHZ = ≥ 40 dB 1250MHz~3000MHZ = ≥ 60 dB
Max. Input Power	20W CW
Operating Temperature	-40° ~ +85° C
Weight Approx.	Plastic- 4 oz
Connector	SMA- Female
Surface Finish	Black Paint
Dimensions	See Attached Drawing All Dimensions are in Inches

CALL OUR SALES DEPARTMENT FOR MORE INFORMATION OR VARIATIONS OF THIS PRODUCT.


Corry Micronics, Inc. One Plastics Rd. - Corry, PA 16407
(724) 940-7556 ext. 138 Fax (724) 940-7707 www.cormic.com

Corry Micronics Inc. herein referred to CMI, believes this information to be accurate, but makes no warranties, expressed or implied as to the accuracy of this document. CMI assumes no liability for any injury, loss, damage, direct or consequential arising from the use of our products. User assumes all risk whatsoever in connection with its intended use. CMI also reserves the right to change this document without notice. 5/21/2019



CORRY MICRONICS, INC PRELIMINARY SPECIFICATION

Mechanical Drawing

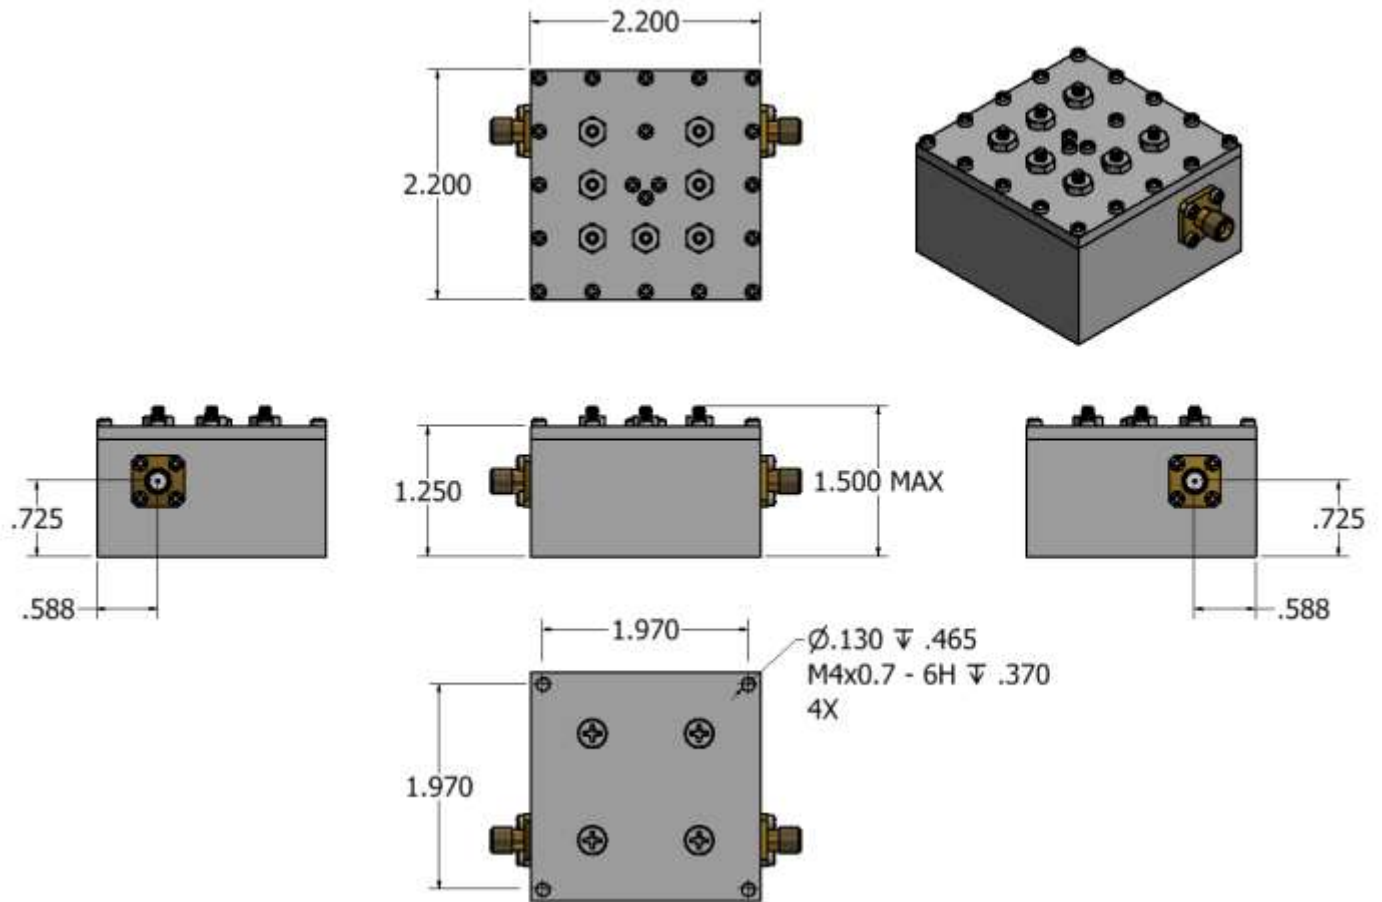

CALL OUR SALES DEPARTMENT FOR MORE INFORMATION OR VARIATIONS OF THIS PRODUCT.

Corry Micronics, Inc. One Plastics Rd. - Corry, PA 16407

(724) 940-7556 ext. 138 Fax (724) 940-7707 www.cormic.com

Corry Micronics Inc. herein referred to CMI, believes this information to be accurate, but makes no warranties, expressed or implied as to the accuracy of this document. CMI assumes no liability for any injury, loss, damage, direct or consequential arising from the use of our products. User assumes all risk whatsoever in connection with its intended use. CMI also reserves the right to change this document without notice. 5/21/2019