

CORRY MICRONICS, INC PRODUCT SPECIFICATION

CMIPA-L23P20 2300 - 2400 MHz LTE-TDD SOLID-STATE HIGH-POWER AMPLIFIER

Functions

- another		
Description		
Operating Temperature Monitor and Alarm		
Serial Control Attenuator, 0.5 dB LSB Steps to 31.5 dB		
Output Power Monitor and Alarm		
Reverse Power Monitor and Alarm		

Electrical Specifications

Parameters	Specifications
Operating Frequency	2300 - 2400 MHz
Signal Type	LTE-TDD, PAR 8 dB
Output power	≥43 dBm
ACLR	≤-32 dBc
TX gain	≥50 dB
Transmit gain flatness	≤±0.6 dB
Transmit Input return loss	≤1.5:1
RX NF	3 dB
RX gain	≥25 dB
Receive gain flatness	≤±0.6 dB
Receive Input return loss	≤2:1
Switch time	≤2 µs
Power Supply	+28 V
RF Connectors	SMA - Female
Power Connectors	Socket with Thread, Connect with Ring Terminal and M3 Screw
Control Connector	2.5 mm pitch 5 pin Connector
Dimensions	See Attached Drawing (Dimensions are in mm)


CALL OUR SALES DEPARTMENT FOR MORE INFORMATION OR VARIATIONS OF THIS PRODUCT.

Corry Micronics, Inc. One Plastics Rd. - Corry, PA 16407 (724) 940-7556 ext. 138 Fax (724) 940-7707 www.cormic.com



CORRY MICRONICS, INC PRODUCT SPECIFICATION

Block Diagram

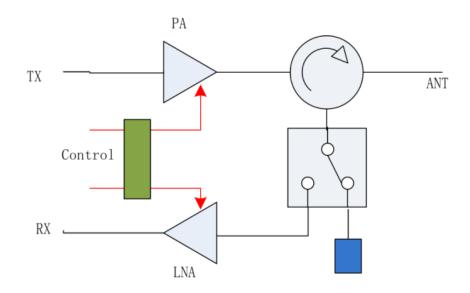

Control Socket Pinout


Pin Number	Definition	Instructions
1	RS485_A	
2	RS485_B	
3	GND	
4	PA_CTL	Amplifier Control Signal, High level On, Low Level Off
5	LNA_CTL	Low Noise Control Signal, High level On, Low Level Off

CALL OUR SALES DEPARTMENT FOR MORE INFORMATION OR VARIATIONS OF THIS PRODUCT.



CORRY MICRONICS, INC PRODUCT SPECIFICATION

Outline Drawing

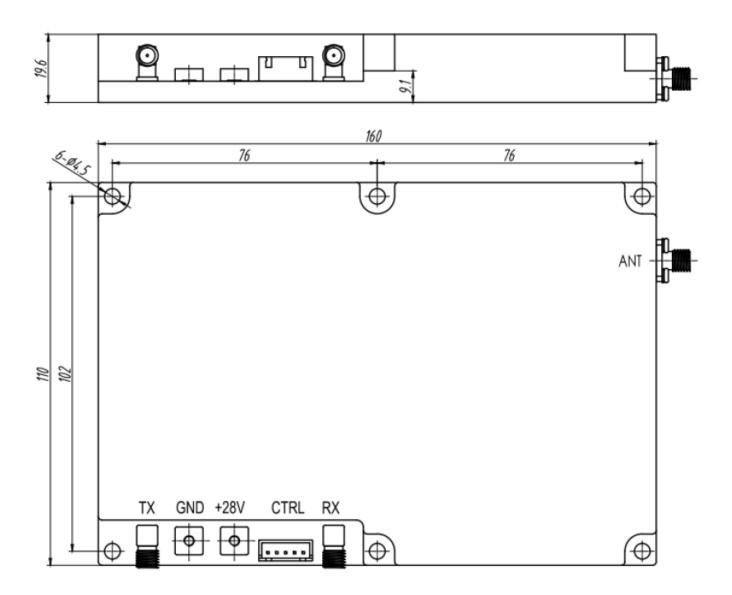

CALL OUR SALES DEPARTMENT FOR MORE INFORMATION OR VARIATIONS OF THIS PRODUCT.

Corry Micronics, Inc. One Plastics Rd. - Corry, PA 16407