


RF FILTER SPECIFICATION

Part No. BP34R836S25C

Electrical Specifications			
Item	Parameter	CMI Specification	Unit
1	Center Frequency [fo]	836.5	MHz
2	Pass Bandwidth [BW]	fo ± 12.5	MHz
3	Insertion Loss in BW	3.0 max.	dB
4	Ripple in BW	1.0 max.	dB
5	V.S.W.R	1.5 max.	-
6	In/Out Impedance	50	Ω
7	Attenuation [Absolute Value]	25 min. @ fo ± 50 MHz	dB
8	Handling Power	1 Watt max.	-
9	Operating Temperature	-30°C - +70°C	

TOP VIEW

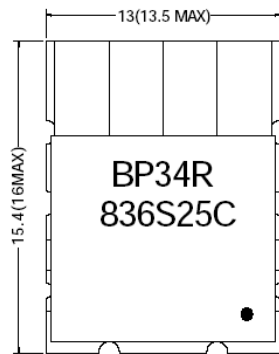


TOLERANCE: .X : ± 0.3
.XX : ± 0.15

UNIT: mm

● : IN

BOTTOM VIEW

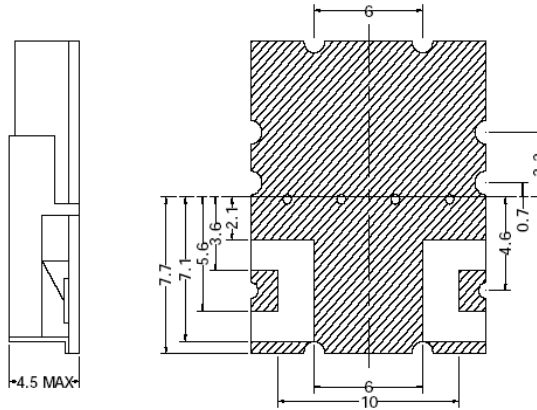

CALL OUR SALES DEPARTMENT FOR MORE INFORMATION OR VARIATIONS OF THIS PRODUCT.

**Corry Micronics, Inc. One Plastics Rd. - Corry, PA 16407
(814) 664-7728 Fax (814) 664-4582 www.cormic.com**

Corry Micronics Inc. herein referred to CMI, believes this information to be accurate, but makes no warranties, expressed or implied as to the accuracy of this document. CMI assumes no liability for any injury, loss, damage, direct or consequential arising from the use of our products. User assumes all risk whatsoever in connection with it's intended use. CMI also reserves the right to change this document without notice.