


### RF FILTER SPECIFICATION

Part No. BP65R881S25C

Electrical Specifications			
Item	Parameter	General Specification	
1	Center Frequency( $f_0$ )	881.5 MHz	
2	Bandwidth (BW)	$f_0 \pm 12.5$ MHz	
3	Insertion loss in BW	3.0 dB max.	
4	Ripple in BW	0.5 dB max.	
5	VSWR	1.5 max.	
6	Input power	- watt max.	
7	Attenuation □ Absolute Value	Frequency	Specification
		849 MHz	15 dB min.
		914 MHz	15 dB min.


TOP VIEW



TOLERANCE: .X :  $\pm 0.01$   
 .XX :  $\pm 0.006$

UNIT: inch  
 ● : IN

BOTTOM VIEW

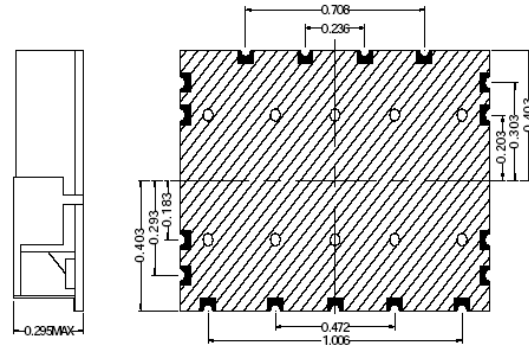

■ : EXPOSED METAL  
 ■ : SOLDER MASK

**CALL OUR SALES DEPARTMENT FOR MORE INFORMATION OR VARIATIONS OF THIS PRODUCT.**

**Corry Micronics, Inc. One Plastics Rd. - Corry, PA 16407**  
**(814) 664-7728 Fax (814) 664-4582 [www.cormic.com](http://www.cormic.com)**

Corry Micronics Inc. herein referred to CMI, believes this information to be accurate, but makes no warranties, expressed or implied as to the accuracy of this document. CMI assumes no liability for any injury, loss, damage, direct or consequential arising from the use of our products. User assumes all risk whatsoever in connection with it's intended use. CMI also reserves the right to change this document without notice.