


**RF FILTER SPECIFICATION**

Part No. BP33R3450S100A

Electrical Specifications			
Item	Parameter	CMI Specification	Unit
1	Center Frequency [fo]	3450	MHz
2	Pass BandWidth [BW]	fo 50	MHz
3	Insertion Loss in BW	1.5 max.	dB
4	V S W R in BW	1.5 max.	-
5	Input Power	1 watt max.	-
6	Temperature Range	-10°C - +65°C	C
7	Attenuation [Absolute Value]	30 min. at fo - 430 MHz	dB
		24 min. at fo + 430 MHz	
		30 min. at 1900 - 2600 MHz	
		20 min. at 3800 MHz	
		30 min. at 4150 MHz	
		30 min. at 4300 - 5800 MHz	

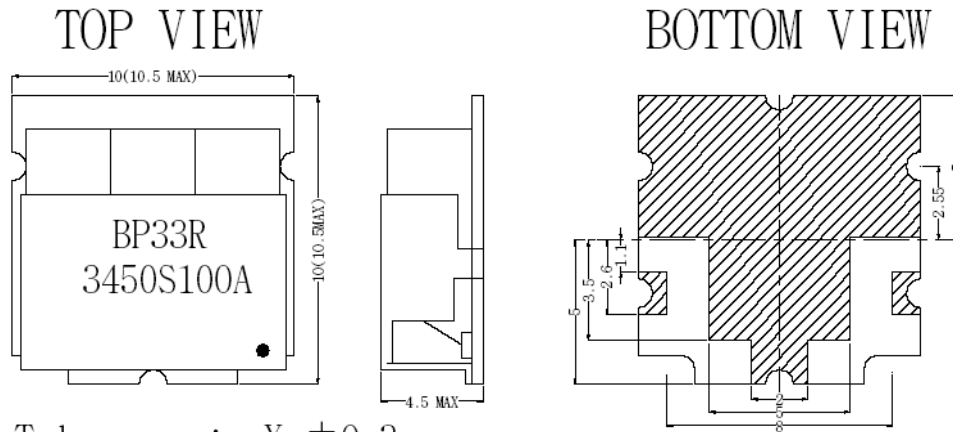

Tolerance : .X ±0.3  
 : .XX ± 0.15  
 UNIT : mm  
 ● : IN

**CALL OUR SALES DEPARTMENT FOR MORE INFORMATION OR VARIATIONS OF THIS PRODUCT.**

**Corry Micronics, Inc. One Plastics Rd. - Corry, PA 16407**  
**(814) 664-7728 Fax (814) 664-4582 www.cormic.com**

Corry Micronics Inc. herein referred to CMI, believes this information to be accurate, but makes no warranties, expressed or implied as to the accuracy of this document. CMI assumes no liability for any injury, loss, damage, direct or consequential arising from the use of our products. User assumes all risk whatsoever in connection with it's intended use. CMI also reserves the right to change this document without notice.